TA-F7/TA-F7B

UK Model
AEP Model

TA-F7: silver panel
TA-F7B: black panel

TA-F7

INTEGRATED STEREO AMPLIFIER

SPECIFICATIONS

GENERAL

Power Requirements: 220V, 50/60 Hz (AEP model)
240V, 50/60 Hz (UK model)

Power Consumption: 400W (AEP model)
410W (UK model)

Dimensions: Approx. 430 (w) x 170 (h) x 420 (d) mm
17 (w) x 6 3/4 (h) x 16 5/8 (d) inches
Including projecting parts and controls

Weight: Approx. 20.3 kg, 44 lb 12 oz (net)
Approx. 24.3 kg, 53 lb 9 oz (with shipping carton)

PREAMPLIFIER SECTION

Harmonic Distortion: Less than 0.015% at rated output (AEP model)
Less than 0.015% at 1W (UK model)

IM Distortion: (60Hz:7 kHz = 4:1)
Less than 0.015% at rated output (AEP model)
Less than 0.015% at 1W (UK model)

Frequency Response:
PHONO 1, 2 RIAA equalization curve ± 0.2 dB
TUNER, AUX 1, 2, TAPE 1, 2: 5–100,000 Hz $^{0}_{-1}$ dB

Tone Controls:
BASS ± 10 dB at 30 Hz (TURNOVER FREQ 150 Hz)
± 10 dB at 60 Hz (TURNOVER FREQ 300 Hz)
TREBLE ± 10 dB at 20 kHz (TURNOVER FREQ 4 kHz)
± 10 dB at 40 kHz (TURNOVER FREQ 8 kHz)

Filters: LOW 12 dB/oct. below 30 Hz
HIGH 12 dB/oct. above 9 kHz

— Continued on next page —

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND ⚠ MARK ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SONY®
SERVICE MANUAL

Inputs:

	Sensitivity	Impedance	Maximum Input Capability (THD 0.015% at 1 kHz)	S/N (weighting network, input level)
PHONO 1 PHONO 2	2.5 mV (-50 dB)	50 kΩ	250 mV (-10 dB)	75 dB (A, 2.5 mV)
TUNER AUX 1, 2 TAPE 1, 2	150 mV (-14.5 dB)	50 kΩ	———	95 dB (A, 150 mV)

Outputs:

	Output Level	Impedance
REC OUT 1,2	150 mV	10 kΩ
PRE OUTPUT	1 V	1.5 kΩ

POWER AMPLIFIER SECTION

Continuous RMS Power Output: (rated output) (Less than 0.015% harmonic distortion)
Both channels driven simultaneously
At 20–20,000 Hz
70 + 70W (8Ω)
According to DIN 45500
70 + 70W (8Ω)

Power Bandwidth: 5–40,000 Hz, IHF (8Ω, 0.015 THD)

Damping Factor: 60 (8Ω, 1 kHz)

Harmonic Distortion: Less than 0.015% at rated output
Less than 0.015% at 1W output

IM Distortion: (60 Hz:7 kHz = 4:1) Less than 0.015% at rated output
Less than 0.015% at 1W output

Frequency Response: dc-100,000 Hz $\pm^{0}_{1}$ dB (1W)

S/N Ratio: Greather than 110 dB, short-circuited input

Residual Noise: Less than 0.12 mV

Inputs: POWER INPUT
Sensitivity 1V (for rated output)
Impedance 100 kΩ

Outputs: SPEAKER A, B
Accept speakers of 8Ω or more
HEADPHONES
Accepts low- and high-impedance stereo headphones

0 dB = 0.775 V

MODEL IDENTIFICATION

– Specification Label –

UK model

SONY®
INTEGRATED STEREO AMPLIFIER
MODEL NO. TA-F7
AC 240V ~ 50/60Hz 410W
SERIAL NO.
MADE IN JAPAN

SONY®
INTEGRATED STEREO AMPLIFIER
MODEL NO. TA-F7B
AC 240V ~ 50/60Hz 410W
SERIAL NO.
MADE IN JAPAN

AEP model

SONY®
INTEGRATED STEREO AMPLIFIER
MODEL NO. TA-F7
AC 220V ~ 50/60Hz 400W
SERIAL NO.
MADE IN JAPAN

SONY®
INTEGRATED STEREO AMPLIFIER
MODEL NO. TA-F7B
AC 220V ~ 50/60Hz 400W
SERIAL NO.
MADE IN JAPAN

SECTION 1
OUTLINE

1-1. CIRCUIT DESCRIPTION

1-1-1. Equalizing Amplifier

Refer to Fig. 1-1. The input signal from PHONO 1 or PHONO 2 goes to the gate G1 of the dual-FET differential amplifier Q101 and the feedback signal from the output goes to the gate G2. Q101 amplifies these two input signals, and its output signals at the drains D1 and D2 are in reversed phase. Q106 and D101 are the load of the differential amplifier and compose a current-mirror circuit. This current mirror makes the diffential amplifier have more gain and less distortion by re-using the output current in other than the load of the differential amplifier and making it a load current. The output signal appeared in the drain D1 next goes to the base of Q107.

Q107 and Q108 compose a darlington circuit, and this circuit has a proper gain by having a constant-current source Q109. Q102 in the source return of the differential amplifier Q101 is a constant-current source and serves as an infinite impedance against the input signal to the differential amplifier. Transistor Q102 is used instead of a large resistor in this stage, because the dual FET Q101 is drawing a relatively large current from the limitted B+ voltage to improve audio quality.

Q103 and Q104 compose a voltage regulator and the voltage V_0, namely the base-bias of Q102, is maintained constant to make Q102 stable. The current I_1 which flows through the constant-current source Q102 is expressed as

$$I_1 \fallingdotseq \frac{V_0 - V_{BE1}}{R106}$$

where $V_0 = V_{BE2} + V_1$

V_1 is determined by I_0 which flows through R112 by V_{BE2}

So, I_1 is determined by V_{BE1} and V_{BE2} and is independent upon B+ and B- voltages, namely I_1 is constant.

Furthermore, this equalizing amplifier is stabilized dc-current-wise by utilizing a dc feedback circuit of Q105 as well as the dependent feedback circuit to produce the RIAA deemphasis curve. Here, Q105 serves as a voltage follower and its dc gain G is determined as

$$G \fallingdotseq \frac{R110}{R107} \fallingdotseq 30\,dB$$

The lower-side cutoff frequency is determined by R116 and C107 in the gate circuit of Q105.

The RIAA curve to be used as a record amplifier is produced by the feedback components C105, C106, R108, R109, R120 and C109. And the output signal is fed back to the gate G2 of Q101, thus making a voltage feedback loop.

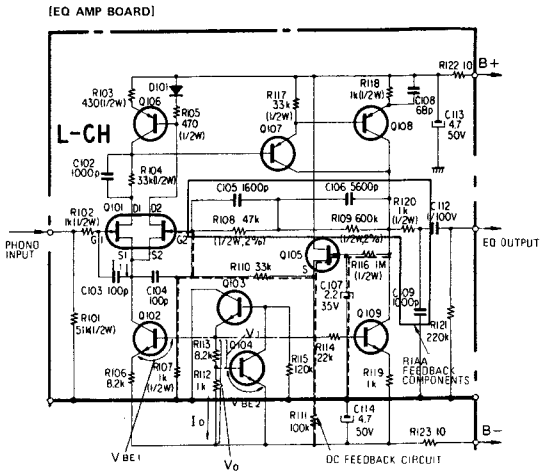

Fig. 1-1.

1-1-2. Power Amplifier

(1) Class-A Amplifier

Refer to Fig. 1-2 and Fig. 1-3. The output signal from the preamplifier section goes to the gate G1 of the dual-FET differential amplifier Q605. The output signal of the class-B amplifier is fed through a feedback route back to the other gate G2 of Q605. These two input signals are amplified in Q605 and mutually reversed-phase output signals are obtained at its drains D1 and D2. Q603, Q604 and Q605 are composing a cascoded differential amplifier, and Q601 and Q602 are its load. Q601 and Q602 also compose a current-mirror circuit and of a push-pull configuration. By utilizing this current-mirror circuit, two outputs are compounded resulting in a high amplification with less distortion.

Due to the high-gain operation of the first stage, Q603 and Q604 lock the drain voltage V_D of Q605 and shift the level, and thus reducing noise component produced by the drain current. The locked drain voltage V_D is expressed as

$$V_D \fallingdotseq V_{CC} \times \frac{R604}{R603 + R604} \fallingdotseq 15\,V$$

The output signal at the drain of Q603 next goes to the class-A cascoded amplifier composed of Q607 and Q608 which has a constant-current load Q611. And its output signal is next applied to and voltage amplified by the following class-B amplifier.

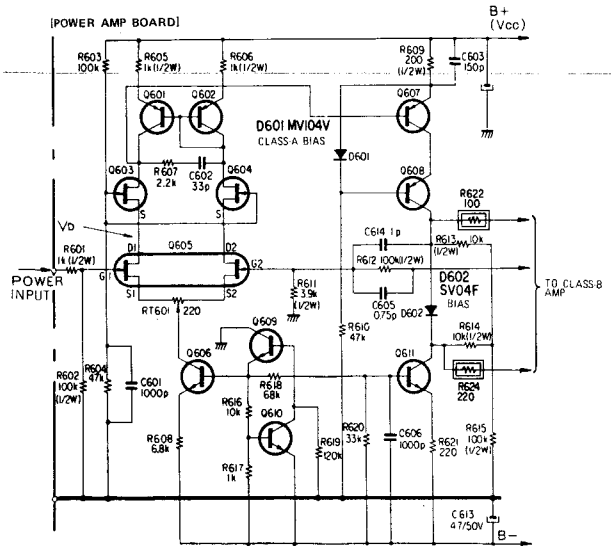

Fig. 1-2.

These two cascoded amplifiers composed of Q603 to Q605, and of Q607 and Q608 are the combination of the common emitter (or source) and common base (or gate) circuits. In these amplifiers, the mirror effect due to the feedback capacitor from the output side does not present, so they are increasing the transmission capability of high-frequency component. Furthermore, R607 and C602 are connected inbetween the drains of Q603 and Q604 of the first-stage cascoded differential amplifier to make the load impedance low at high frequency, and thus reducing the fluctuation of the amplifier gain.

(B) Class-B Amplifier

Refer to Fig. 1-3. These class-B amplifiers are cascode-type amplifiers utilizing features of the bipolar transistors and V-FETs, and they are improving the signal-transmission characteristics.

Q616 is a class-B driver and emitter follower followed by the final-stage power amplifier. The final-stage power amplifier is a pure-complementary circuit composed of cascode configuration of Q618, Q619 and Q901 to Q903.

When the bipolar transistors and V-FETs are connected in a cascode configuration, V_{CE} of the bipolar transistors Q618 and Q619 becomes the reversed bias of the gate of V-FET and this bias prevents V-FET from damaging, otherwise V-FET may be damaged by a huge current equivalent to I_{DSS}. This reversed bias of V-FET provides a good rejection characteristis against the fluctuation of the power supply voltage. In this configuration, the voltage applied to the bipolar transistor becomes as low as around 15 V and bipolar transistors with a high transition frequency f_T can be combined.



Fig. 1-3.

1-1-3. Power Supply

Refer to Fig. 1-4. This regulated power supply provides a power for the class-B amplifier. This voltage regulator uses a constant-current circuit Q706 in the base-bias circuit of the control transistors Q704 and Q705. And this voltage regulator provides a high input impedance, low output impedance and a good regulation against the fluctuation in the input voltage.



Fig. 1-4.

Fig. 1-5 shows the basic voltage-regulating circuit.



Fig. 1-5.

The voltage regulation factor is expressed as

$$\frac{\Delta V_o}{\Delta V_i} \fallingdotseq \frac{Rd}{R1 + Rd}$$

where, ΔV_o = fluctuation of output voltage
ΔV_i = fluctuation of input voltage
Rd_1 = active resistance of D1

Accordingly, on a constant Rd_1, the larger R1 the better a voltage regulation. In the circuit in Fig. 1-4, a good voltage regulation is obtained by utilizing an FET-type constant-current source and a large R1.

The output impedance of the circuit in Fig. 1-5 is expressed as

$$R_o \fallingdotseq \frac{\Delta V_o}{\Delta I_o}$$

$$\fallingdotseq \frac{Rb + Rd}{1 + h_{FE}}$$

where, Rb = base resistance of Q1
h_{FE} = current amplification factor of Q1

Therefore, a low output impedance is obtainable with a transistor having a large h_{FE}. So in the actual circuit in Fig. 1-4, a darlington configuration is used in the place of Q1 in Fig. 1-5 together with a large resistance R1.

To obtain a good rejection factor against the ripple component, a bootstrap circuit composed of R709 and D711 is used.

1-2. BLOCK DIAGRAM

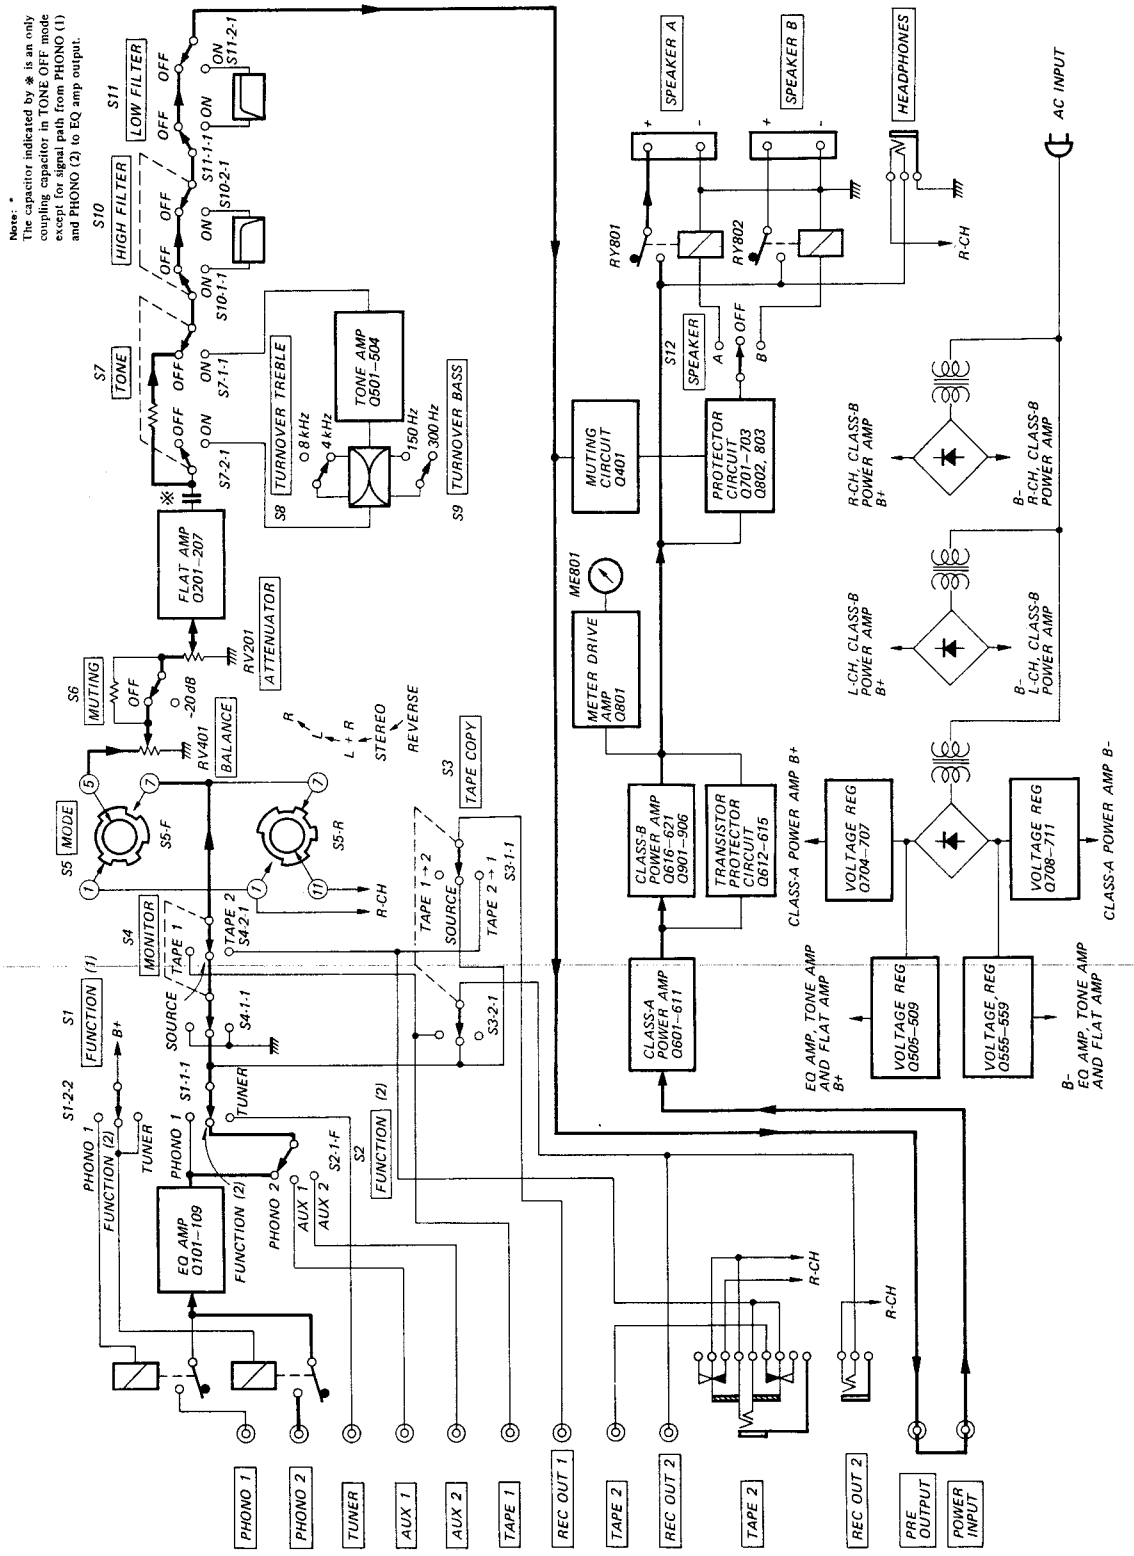

SECTION 2
DISASSEMBLY

Note: Remove in the numerical order.

CASE REMOVAL

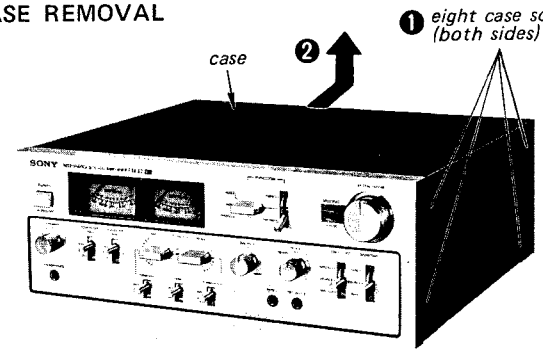

PANEL REMOVAL

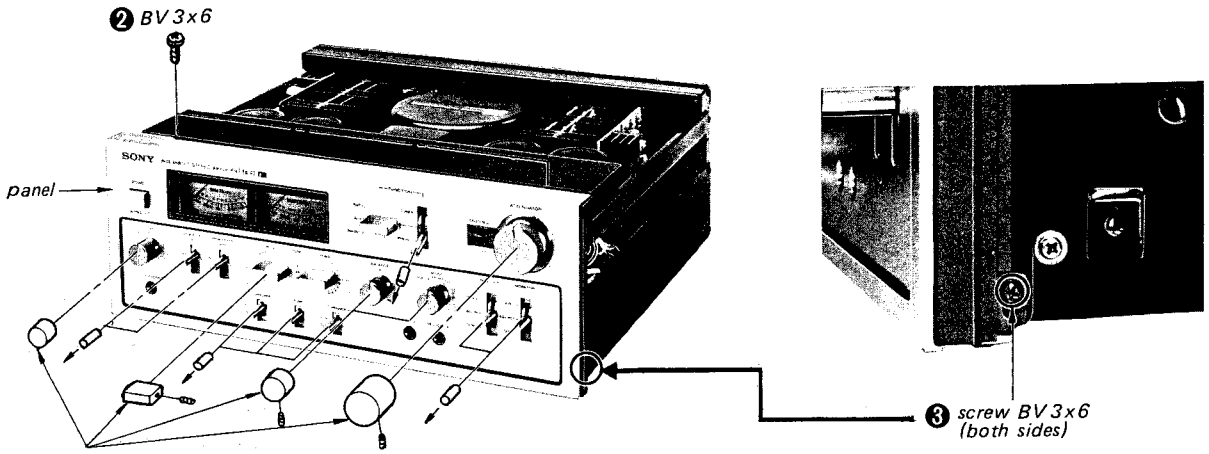

BOTTOM COVER REMOVAL AND PANEL OVERTURNING

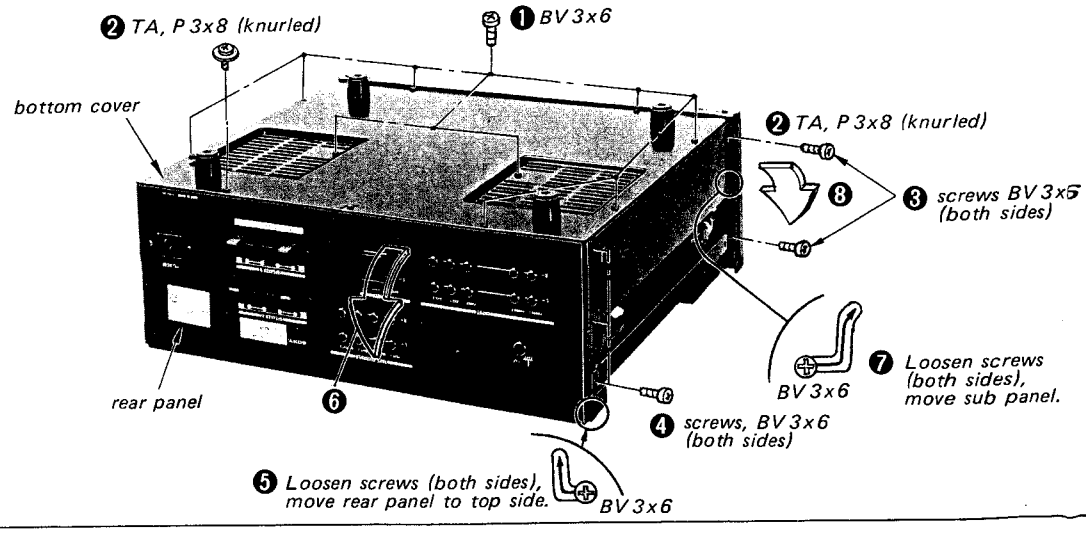

POWER V-FET REPLACEMENT

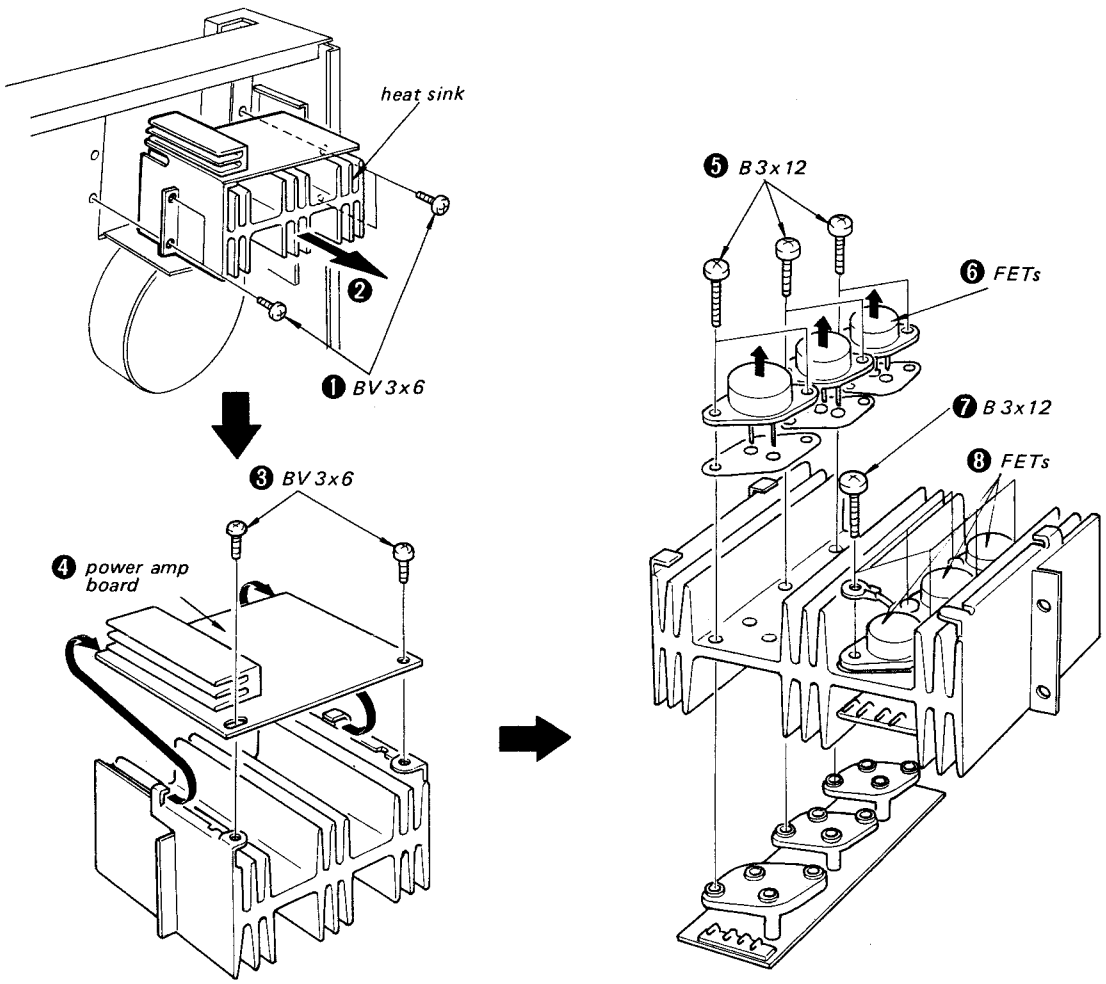

CHECKING OF THE BOARD

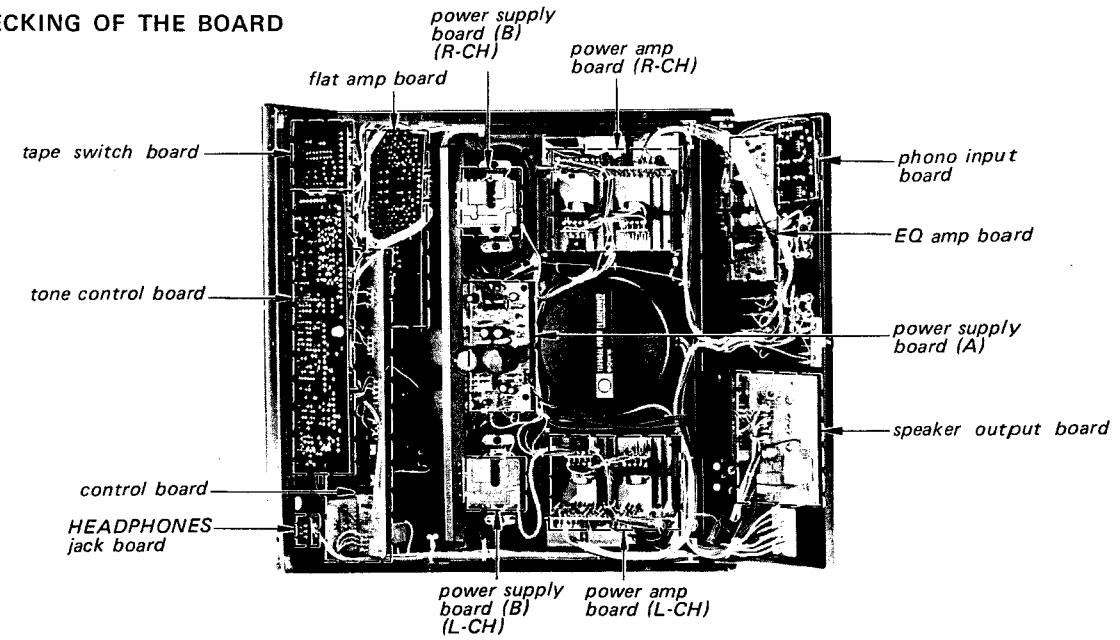

SECTION 3
ADJUSTMENT

Note: 1. As outlined in the circuit description, this set uses bipolar transistors and V-FETs in cascode circuit to maintain stable biasing. When replacing the three P-channel V-FETs 2SK60 and/or the three N-channel V-FETs 2SJ18 in each channel, use three matched ones which have the same Vp (pinch-off voltage)-rank figure printed on them as shown below. The fluctuation of the Vp rank of the three can be acceptable on one-rank-difference basis.

Vp (pinch-off voltage) rank

2. When the power transistors are replaced, be sure to perform the DC BIAS and DC BALANCE adjustments again.
3. Perform DC BIAS and DC BALANCE adjustments a few minutes passed after POWER switch turned ON.
4. Repeat DC BIAS and DC BALANCE adjustments a few times because they affect each other.

DC Balance Adjustment

1. Connect a dc millivoltmeter to SPEAKER terminals.
2. Turn POWER switch ON. Adjust RT601 (L-CH) and RT651 (R-CH) for 0V reading on the millivoltmeter.



Note:
When the controls are turned in the arrowed direction ※, voltage reading increases.
Same power-amp circuit boards are used in both L- and R-channels. Component reference numbers printed on the circuit board are different from the circuit and mounting diagrams.

DC Bias Adjustment

1. Connect a VOM to the dc-bias check points.
2. With no input signal, adjust RT602 (L-CH) and RT652 (R-CH) for 12 mV reading on VOM.

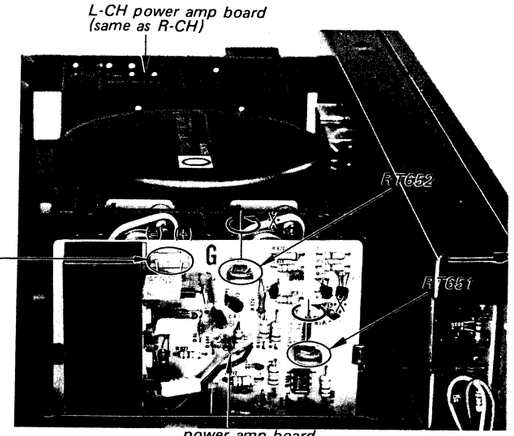

Power Meter Adjustment

Setting:

ATTENUATOR control:	maximum		
HIGH FILTER switch:	OFF	TONE controls:	mechanical mid
LOW FILTER switch:	OFF	BALANCE control:	mechanical mid
MONITOR switch:	SOURCE	MUTING switch:	OFF
FUNCTION switch:	TUNER		

Procedure:

1.

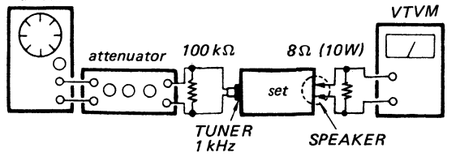

2. Adjust attenuator for 8.9V (10W) reading on VTVM.
3. Adjust RT801 (L-CH) and RT851 (R-CH) so that power meters indicate 10W.

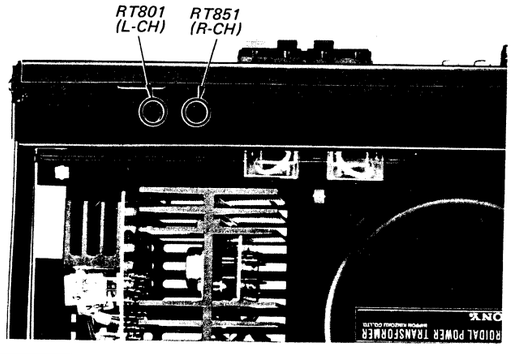

SECTION 4
DIAGRAMS

4-1. MOUNTING DIAGRAM (1) — Preamplifier Section — —

CIRCUIT BOARD LOCATION



Replacement Semiconductors

For replacement, use semiconductors except in ( ).

Q101, 151: 2SK97

Q102–104, Q152–154, Q203, 205, 206, Q253, 255, 256: 2SC1128



Q105, 155: 2SK43-2 (2SK43)
Q201, 202, Q251, 252: 2SK43-3A (2SK43)



Q106, 107, Q156, 157, Q108, 158, Q204, 254: 2SA639S / 2SA896



Q109, 159, Q207, 257: 2SC1811



D101, 151: 1S1555



Note:
- Color code of sleeving over the end of the jacket.



- ⊗ : Through hole.
- ▨ : component-side pattern.
- ▩ : B+ pattern.
- ▩ : B- pattern.

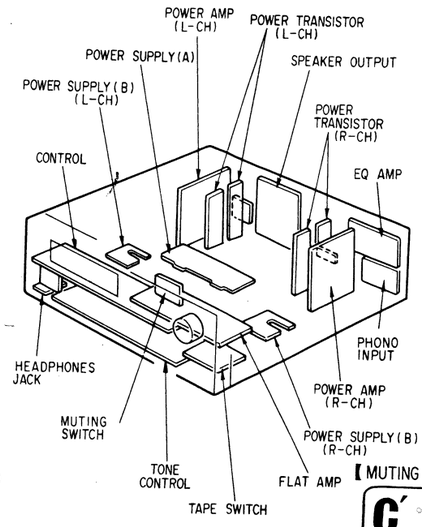

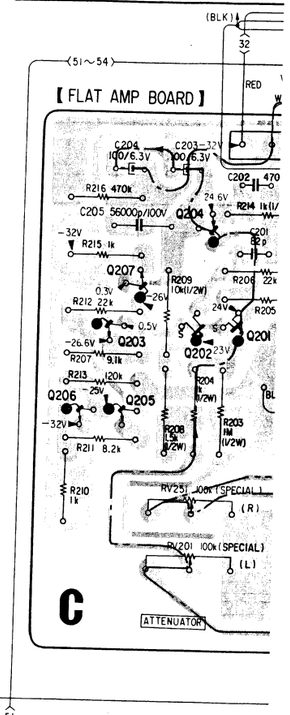

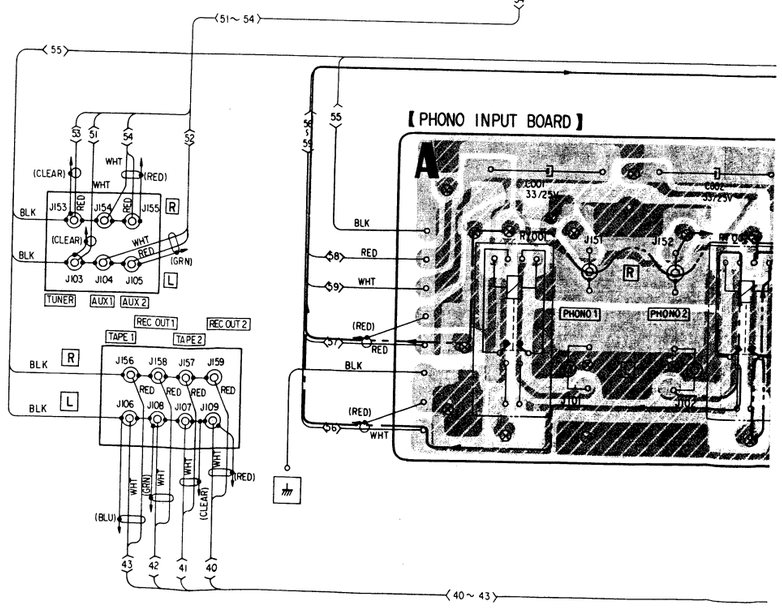

CIRCUIT BOARD LOCATION

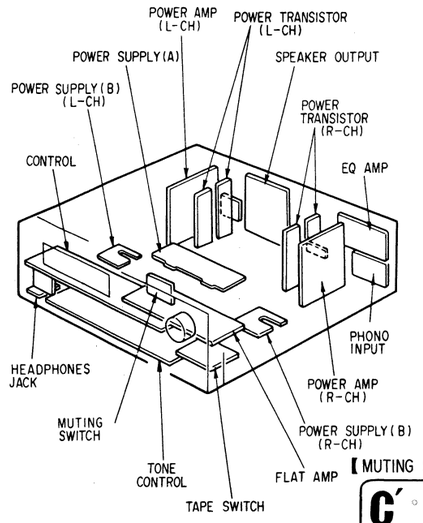

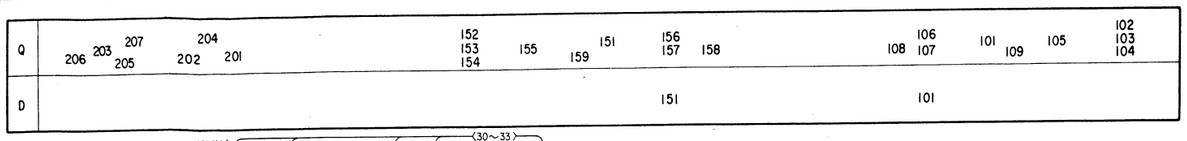

Replacement Semiconductors

For replacement, use semiconductors except in ( ).

Q101, 151: 2SK97



Q102–104, Q152–154, Q203, 205, 206, Q253, 255, 256: 2SC1128



Q105, 155: 2SK43-2 (2SK43)
Q201, 202, Q251, 252: 2SK43-3A (2SK43)



Q106, 107, Q156, 157, Q108, 158, Q204, 254: 2SA639S



Q109, 159, Q207, 257: 2SC1811



D101, 151: 1S1555



Note:

- Color code of sleeving over the end of the jacket.



- ⊗ : Through hole.
- ▨ : component-side pattern.
- ▩ : B+ pattern.
- ▩ : B- pattern.

【FLAT AMP BOARD】

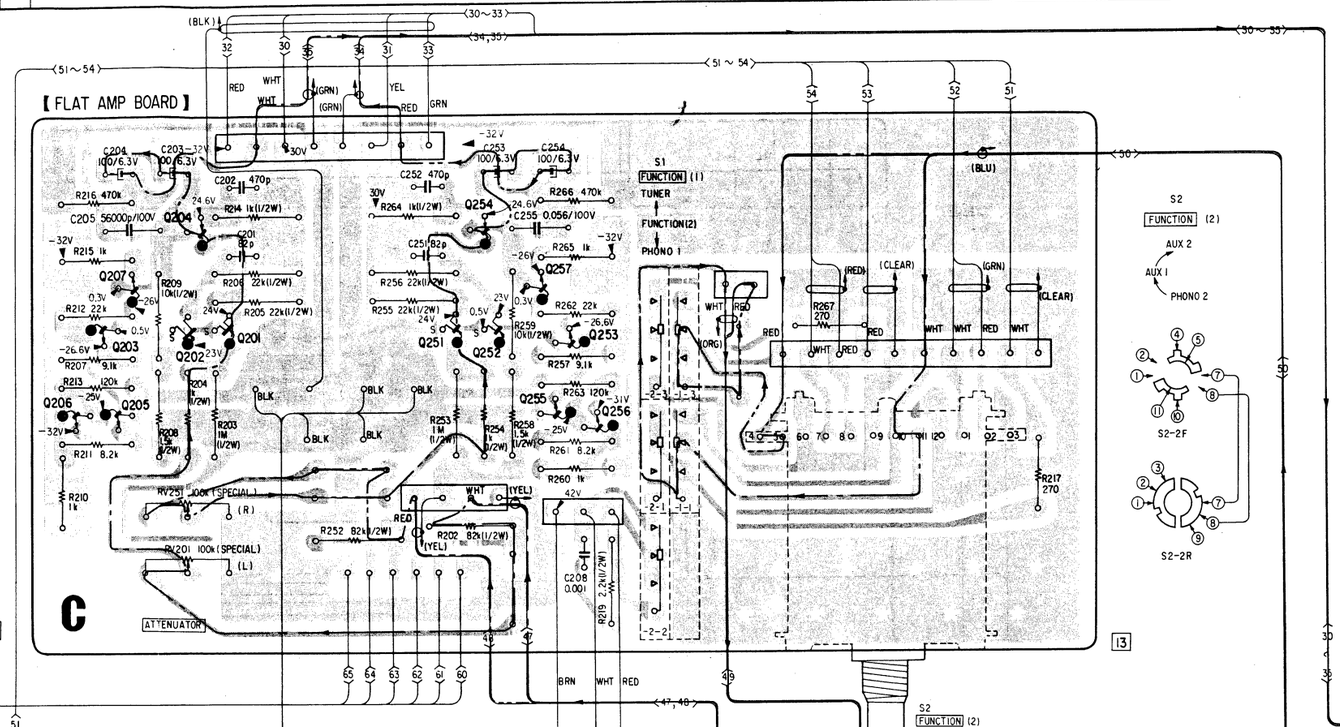

【PHONO INPUT BOARD】

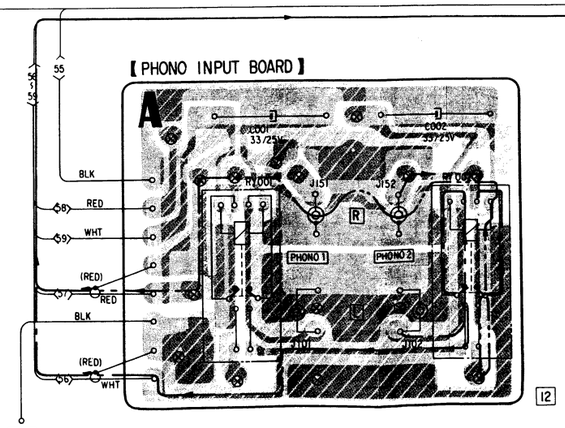

【EQ AMP BOARD】

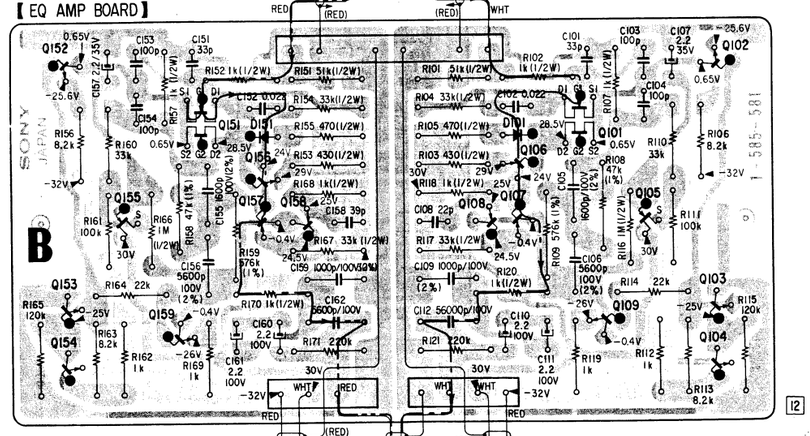

4-2. MOUNTING DIAGRAM (2) – Control Amplifier Section – *– Conductor Side –*

	A	B	C	D	E	F	G	H
Q		401	451	505 506 507	508 509 558 556 557 559 555	551 552 553 554		501 502 503 504
D				501	551			

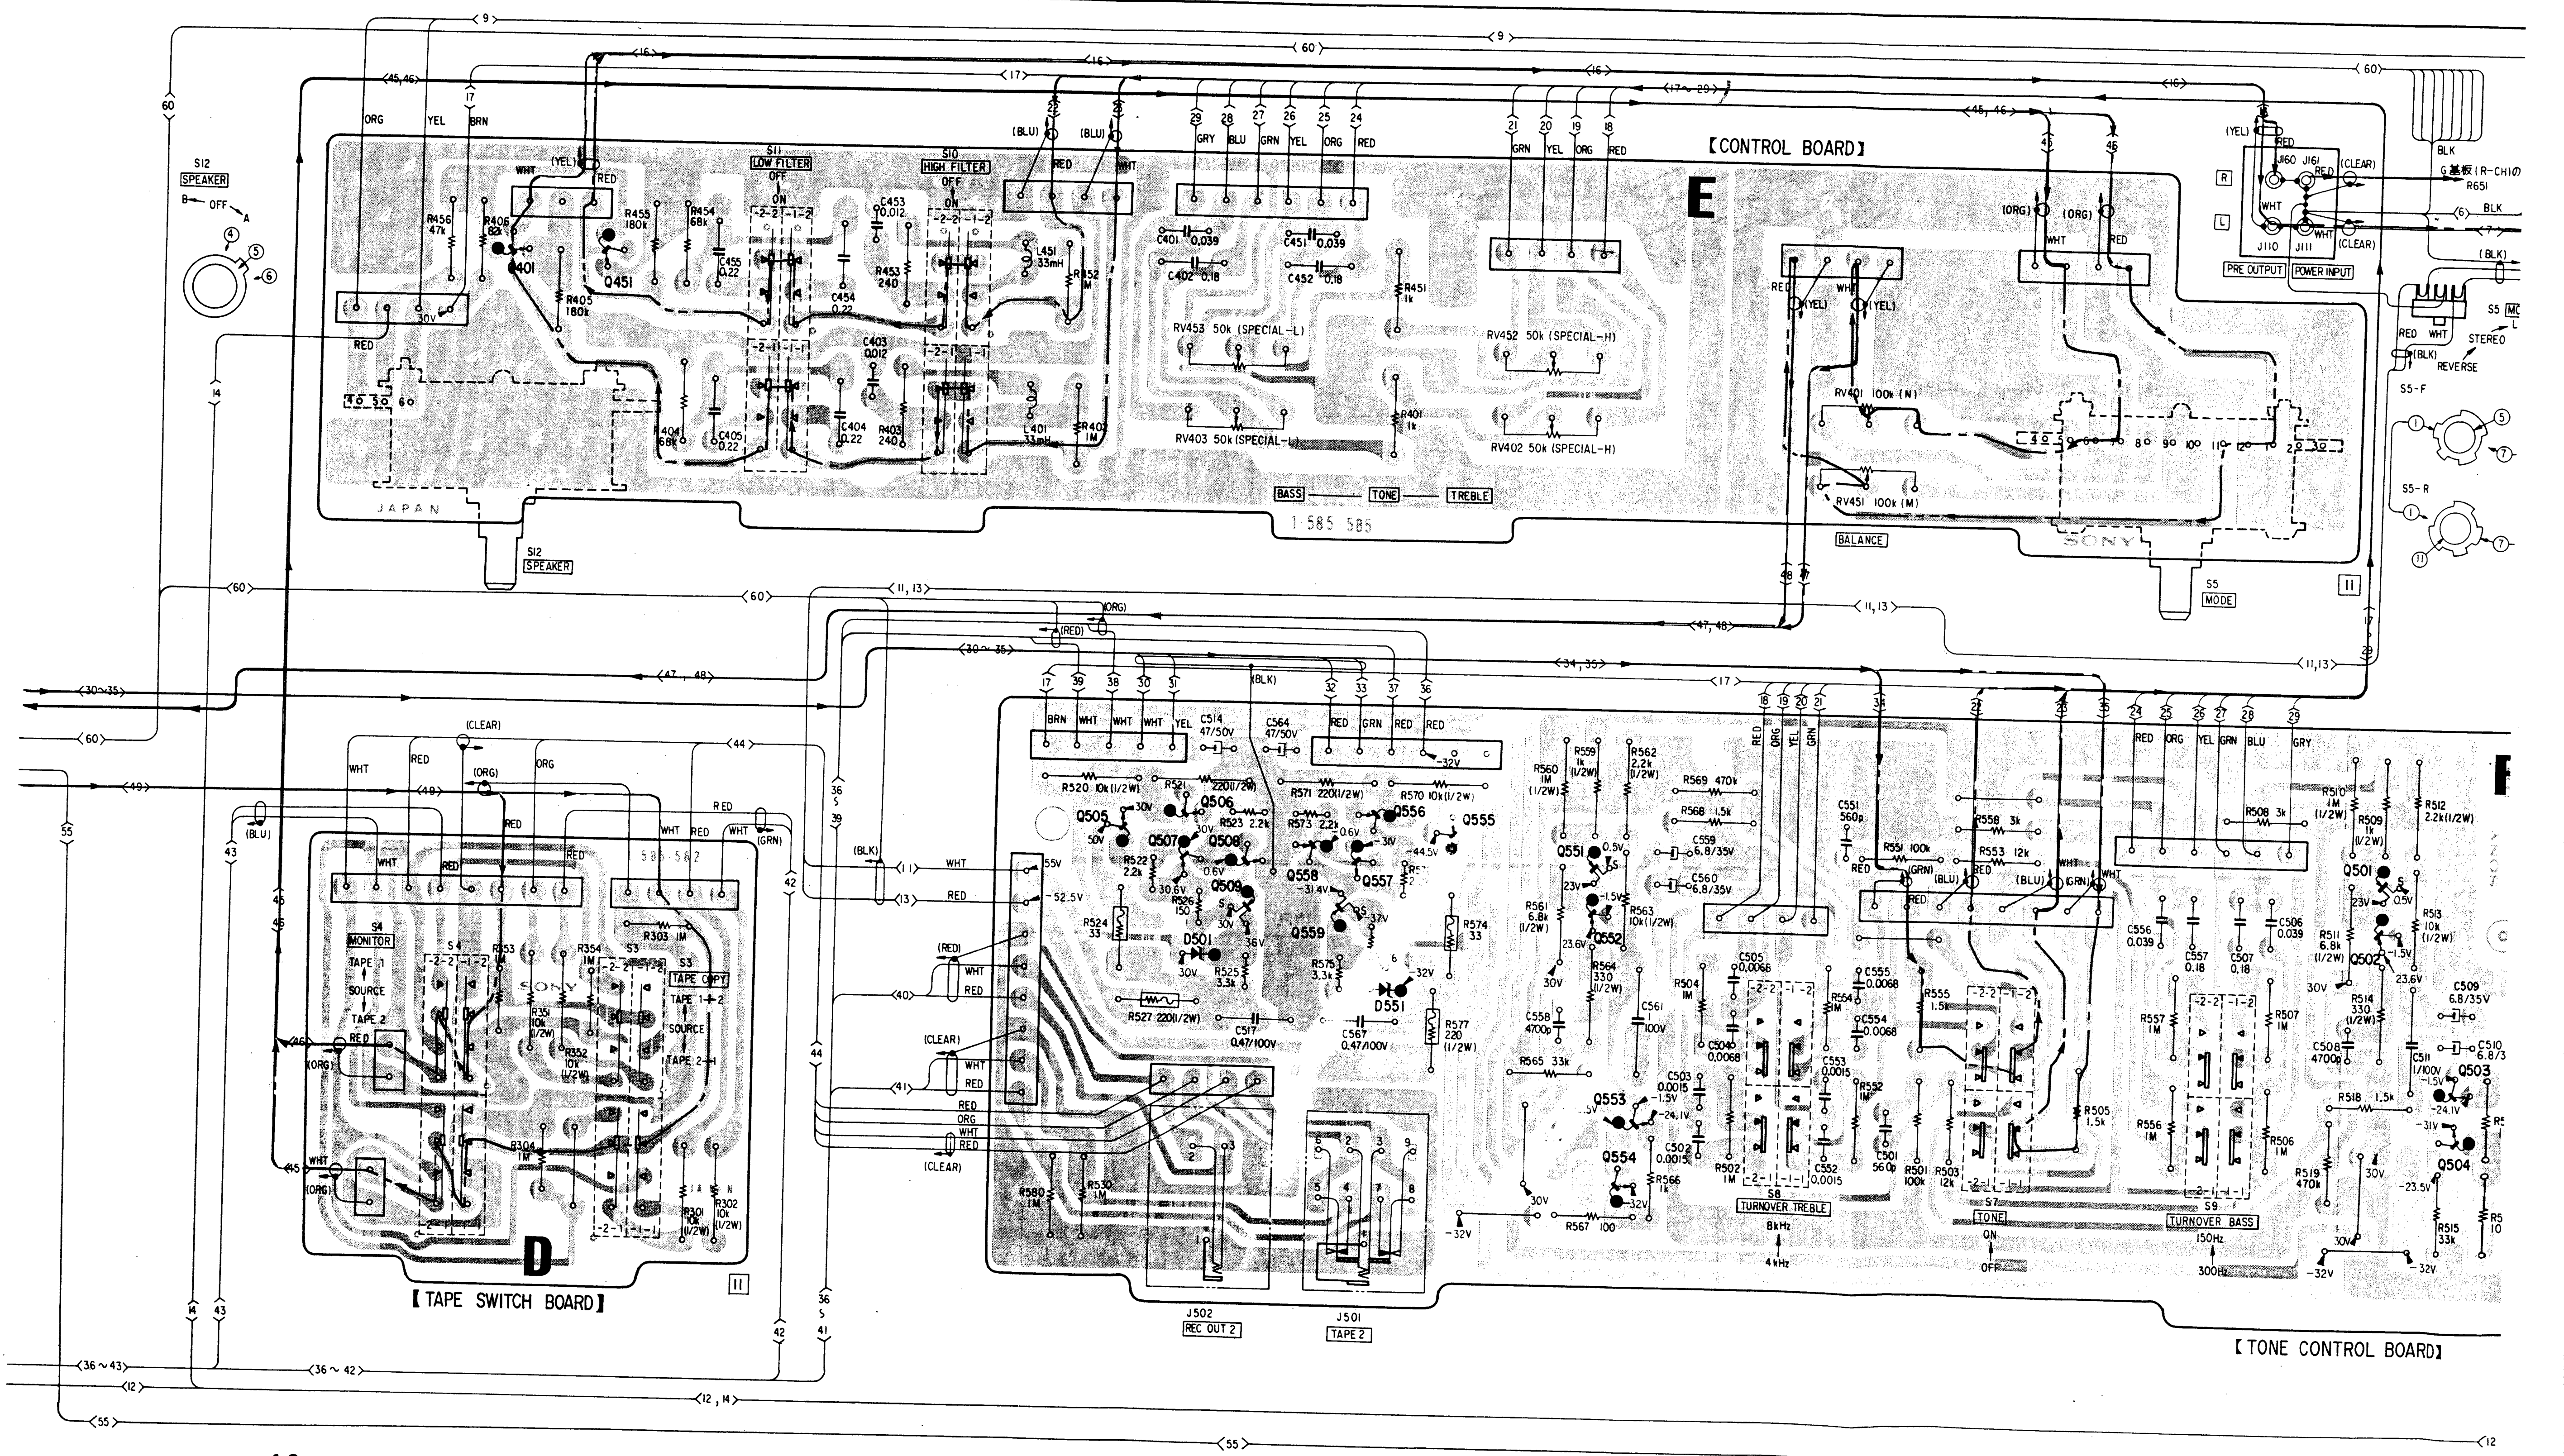

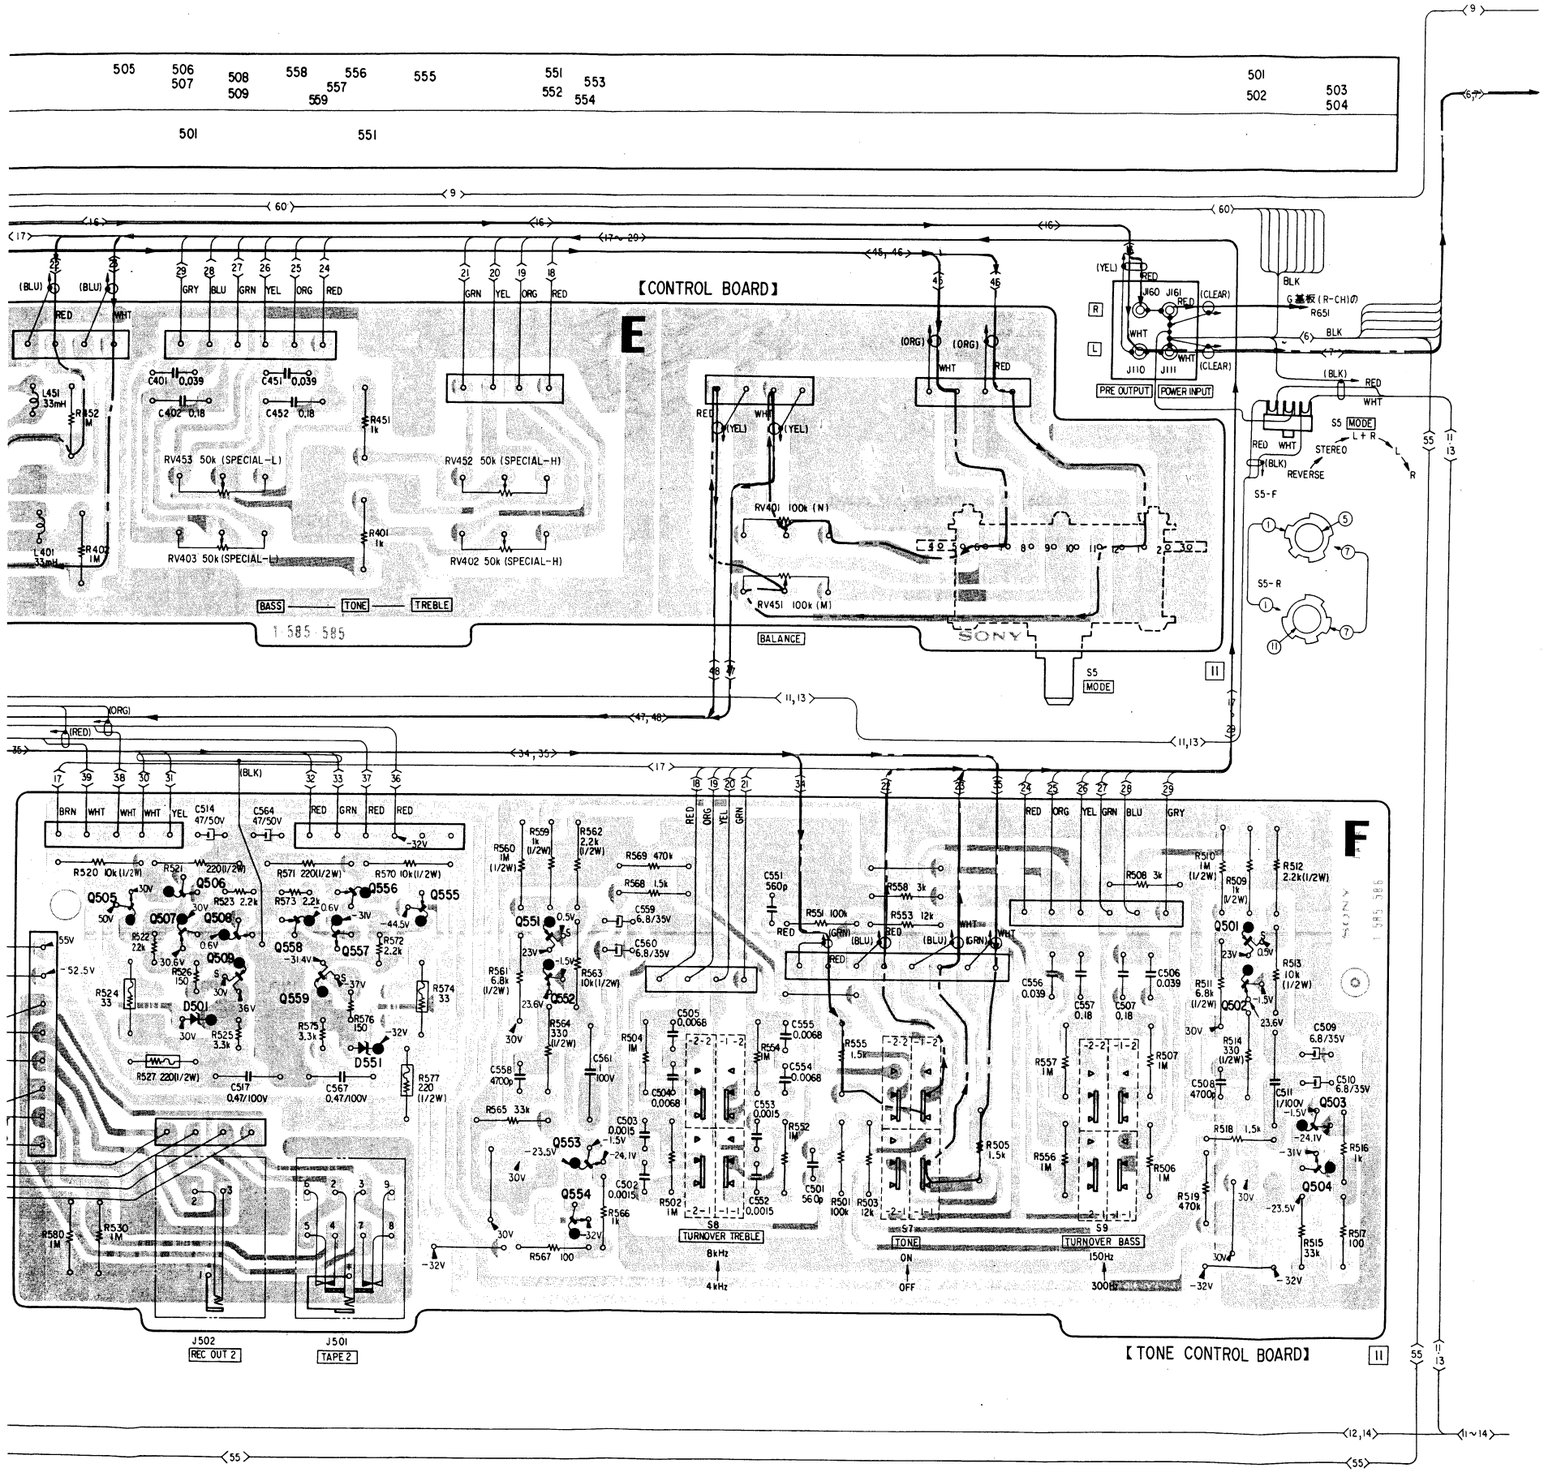

Replacement Semiconductors

For replacement, use semiconductors except in ( ).

Q401, 451: 2SC1636



Q501, 551: 2SK43-3A (2SK43)



Q502, 552: 2SA896



Q503, 553: 2SC1811



Q506, 508, 557: (2SC945)



Q506, 508, 557: 2SC634A



Q504, 554: 2SC1128



Q505: 2SC1061



Q507, 556, 558: 2SA899



Q509, 559: 2SK42-2 (2SK42)



Q555: 2SA671



D501, 551: EQA01-07



Note:

- Color code of sleeving over the end of the jacket.



- ▬ : B+ pattern.
- ▬ : B- pattern.

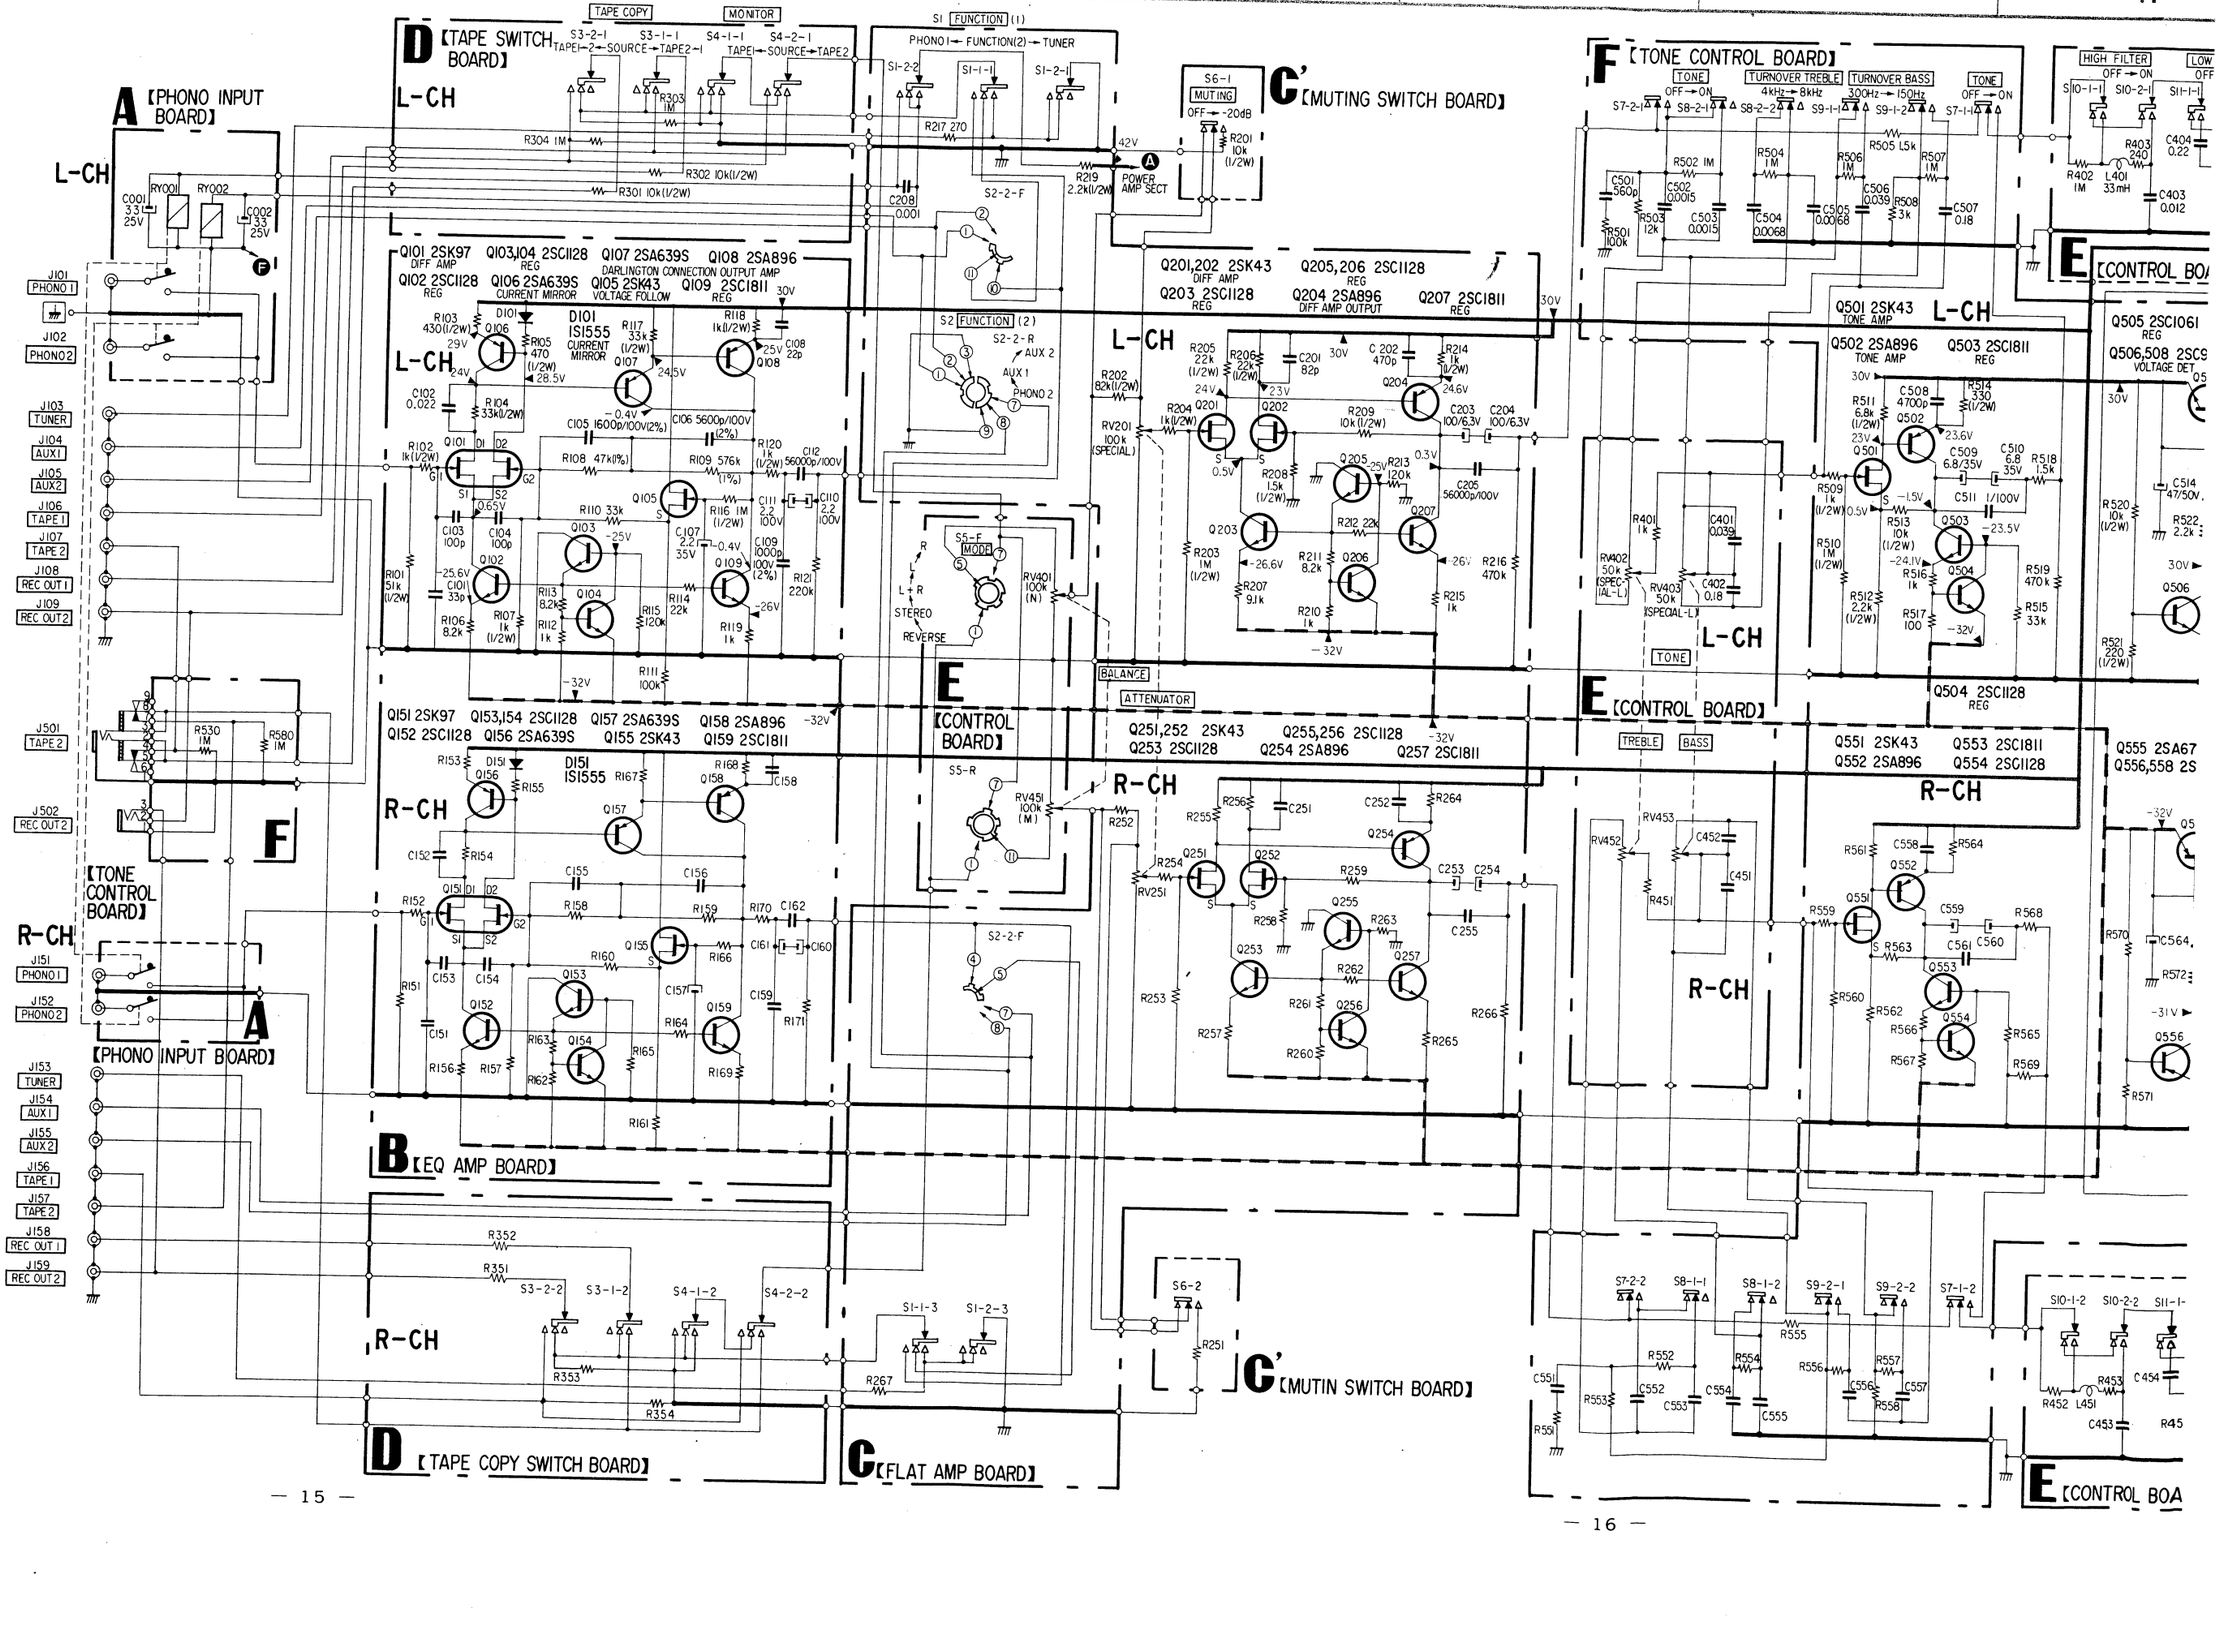
A [PHONO INPUT BOARD]
L-CH
R-CH
D [TAPE SWITCH BOARD]
L-CH
R-CH
C' [MUTING SWITCH BOARD]
F [TONE CONTROL BOARD]
L-CH
R-CH
E [CONTROL BOARD]
L-CH
R-CH
B [EQ AMP BOARD]
R-CH
D [TAPE COPY SWITCH BOARD]
C [FLAT AMP BOARD]
C' [MUTIN SWITCH BOARD]
E [CONTROL BOARD]
E [CONTROL BOA
TAPE COPY
MONITOR
FUNCTION (1)
FUNCTION (2)
MUTING
POWER AMP SECT
BALANCE
ATTENUATOR
TONE
TREBLE
BASS
HIGH FILTER
LOW
J101 PHONO1
J102 PHONO2
J103 TUNER
J104 AUX1
J105 AUX2
J106 TAPE1
J107 TAPE2
J108 REC OUT1
J109 REC OUT2
J501 TAPE2
J502 REC OUT2
J151 PHONO1
J152 PHONO2
J153 TUNER
J154 AUX1
J155 AUX2
J156 TAPE1
J157 TAPE2
J158 REC OUT1
J159 REC OUT2
Q101 2SK97 DIFF AMP
Q103,104 2SC1128 REG
Q107 2SA639S DARLINGTON CONNECTION OUTPUT AMP
Q108 2SA896
Q102 2SC1128 REG
Q106 2SA639S CURRENT MIRROR
Q105 2SK43 VOLTAGE FOLLOW
Q109 2SC1811 REG
Q151 2SK97
Q153,154 2SC1128
Q157 2SA639S
Q158 2SA896
Q152 2SC1128
Q156 2SA639S
Q155 2SK43
Q159 2SC1811
Q201,202 2SK43 DIFF AMP
Q205,206 2SC1128 REG
Q203 2SC1128 REG
Q204 2SA896 DIFF AMP OUTPUT
Q207 2SC1811 REG
Q501 2SK43 TONE AMP
Q502 2SA896 TONE AMP
Q503 2SC1811 REG
Q504 2SC1128 REG
Q505 2SC1061 REG
Q506,508 2SC9 VOLTAGE DET
Q251,252 2SK43
Q255,256 2SC1128
Q253 2SC1128
Q254 2SA896
Q257 2SC1811
Q551 2SK43
Q553 2SC1811
Q552 2SA896
Q554 2SC1128
Q555 2SA67
Q556,558 2S
D101 IS1555 CURRENT MIRROR
D151 IS1555
RY001
RY002
RV201 100k (SPECIAL)
RV401 100k (N)
RV451 100k (M)
RV402 50k (SPECIAL-L)
RV403 50k (SPECIAL-L)
RV452
RV453
S1 FUNCTION
S2 FUNCTION
S5-F MODE
S5-R
S6-1 MUTING
S6-2
S7-2-1
S8-2-1
S8-2-2
S9-1-1
S9-1-2
S7-1-1
S10-1-1
S10-2-1
S11-1-1
S3-2-1
S3-1-1
S4-1-1
S4-2-1
S1-2-2
S1-1-1
S1-2-1
S2-2-F
S2-2-R
S3-2-2
S3-1-2
S4-1-2
S4-2-2
S1-1-3
S1-2-3
S7-2-2
S8-1-1
S8-1-2
S9-2-1
S9-2-2
S7-1-2
S10-1-2
S10-2-2
S11-1-
AUX 2
AUX 1
PHONO 2
STEREO
REVERSE
L+R
TAPE1
SOURCE
TAPE2
PHONO1
FUNCTION(2)
TUNER
OFF
ON
-20dB
4kHz
8kHz
300Hz
150Hz
42V
30V
24V
29V
28.5V
24.5V
25V
24.6V
23V
23.6V
-25V
-26V
-26.6V
-26.5V
-26.1V
-23.5V
-24.1V
-32V
0.3V
0.5V
-1.5V
-0.4V
0.65V
-25.6V
-25.9V
-31V

TA-F7/TA-F7B

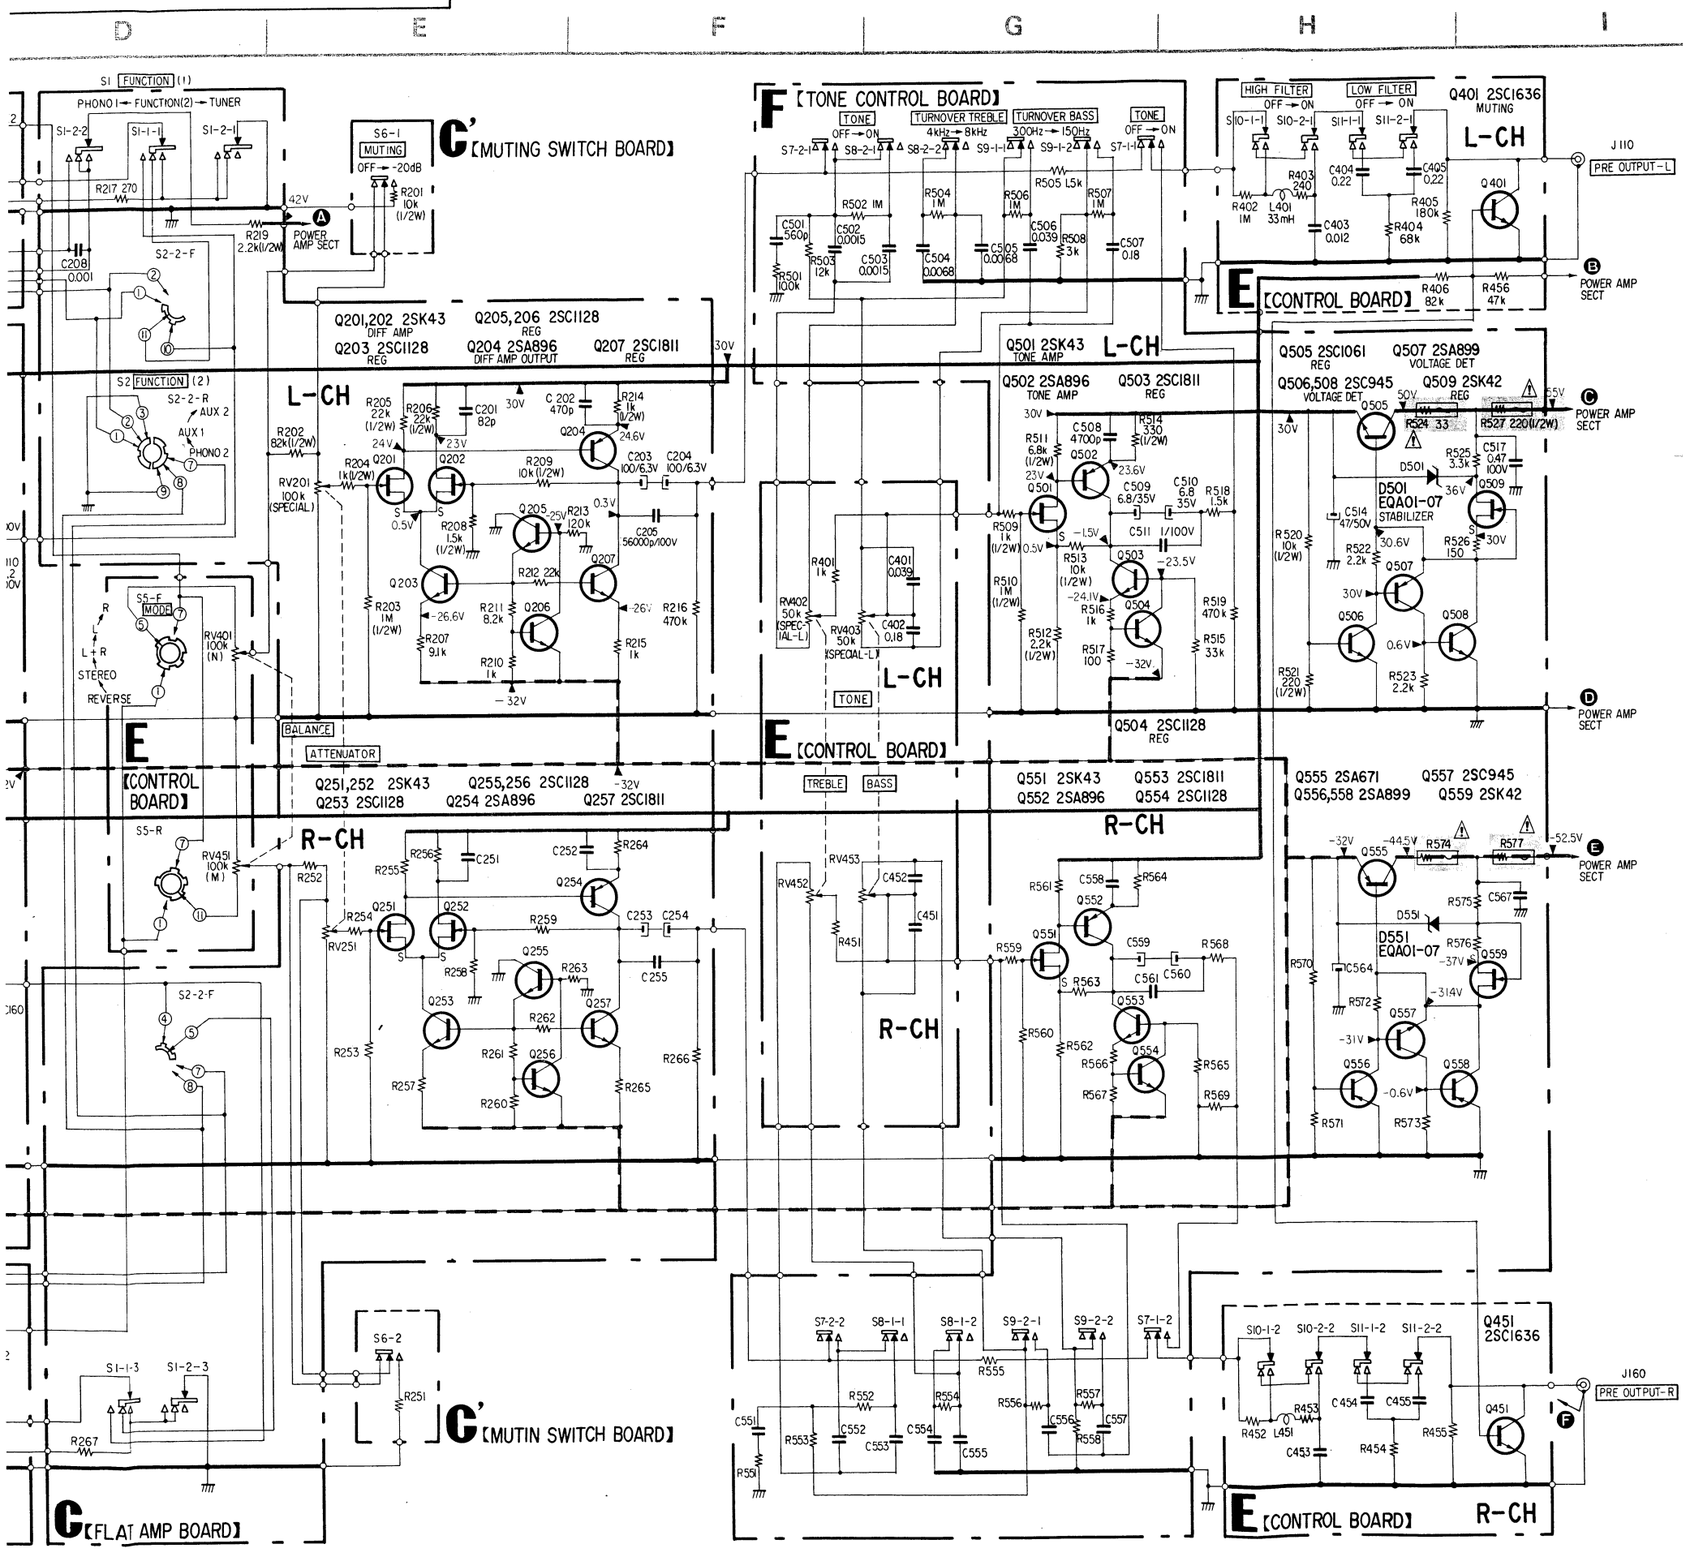

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

Note:

- Components for right channel have same values as for left channel. Reference numbers are coded from.
- All capacitors are in μF unless otherwise noted. pF = μμF 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, ¼W unless otherwise noted. kΩ = 1000Ω, MΩ = 1000kΩ
- ⏦ : fusible resistor.
- 0% indicates component tolerance.
- ▬ : B+ bus.
- ▬▬ : B- bus.
- ▭ : panel designation.
- Readings are taken under no signal conditions with a VOM (20kΩ/V).
- Switch

Ref. No.	Switch	Position
S1	FUNCTION (1)	FUNCTION (2)
S2	FUNCTION (2)	PHONO 2
S3	TAPE COPY	SOURCE
S4	MONITOR	SOURCE
S5	MODE	REVERSE
S6	MUTING	OFF
S7	TONE	OFF
S8	TURNOVER TREBLE	4 kHz
S9	TURNOVER BASS	300 Hz
S10	HIGH FILTER	OFF
S11	LOW FILTER	OFF

4-4. MOUNTING DIAGRAM (3) — Power Amplifier and Power Supply Sections — — Conductor Side —

TA-F7/TA-F7B TA-F7/T

Replacement Semiconductors

For replacement, use semiconductors except in ( ).

Q601, 602
Q651, 652
Q612, 615
Q662, 665
Q702, 802
Q803 : 2SA678



Q613, 614
Q663, 664
Q701, 703
Q801, 851 : 2SC634A



Q904–906
Q954–956 : 2SJ18



Q603, 604
Q653, 654 : 2SK30A-GR (2SK30A)



Q616, 666: 2SC1124



D601, 651: (MV104V)



Q605, 655: 2SK97



Q617, 667: 2SA706



D601, 651: KB462S



Q606, 609
Q610, 656
Q659, 660 : 2SC1128



Q704: 2SC1061
Q618, 619
Q668, 669 : 2SC1173



D602, 652: SV04F



Q607, 657: 2SA639S
Q608, 658: 2SA896



Q710: 2SA671
Q620, 621
Q670, 671 : 2SA473



D603–606
D653–656 : 1S1555
D707
D701–706: 10E2
D708: 10E2 (10E1)
D801, 802
D851, 852 : 1T22A



Q611, 661: 2SC1811



Q706, 711: 2SK42-2 (2SK42)



D709, 710: EQB01-11Z (EQA01-11R
D711, 712: EQB01-07 (EQA01-07)



Q705, 707: (2SC945)



Q708, 709: 2SA899



D751, 752: S5VB



Q705, 707: 2SC634A



Q901–903
Q951–953 : 2SK60



Note:

- Color code of sleeving over the end of the jacket.



- ▬ : B+ pattern.
- ▬ : B– pattern.

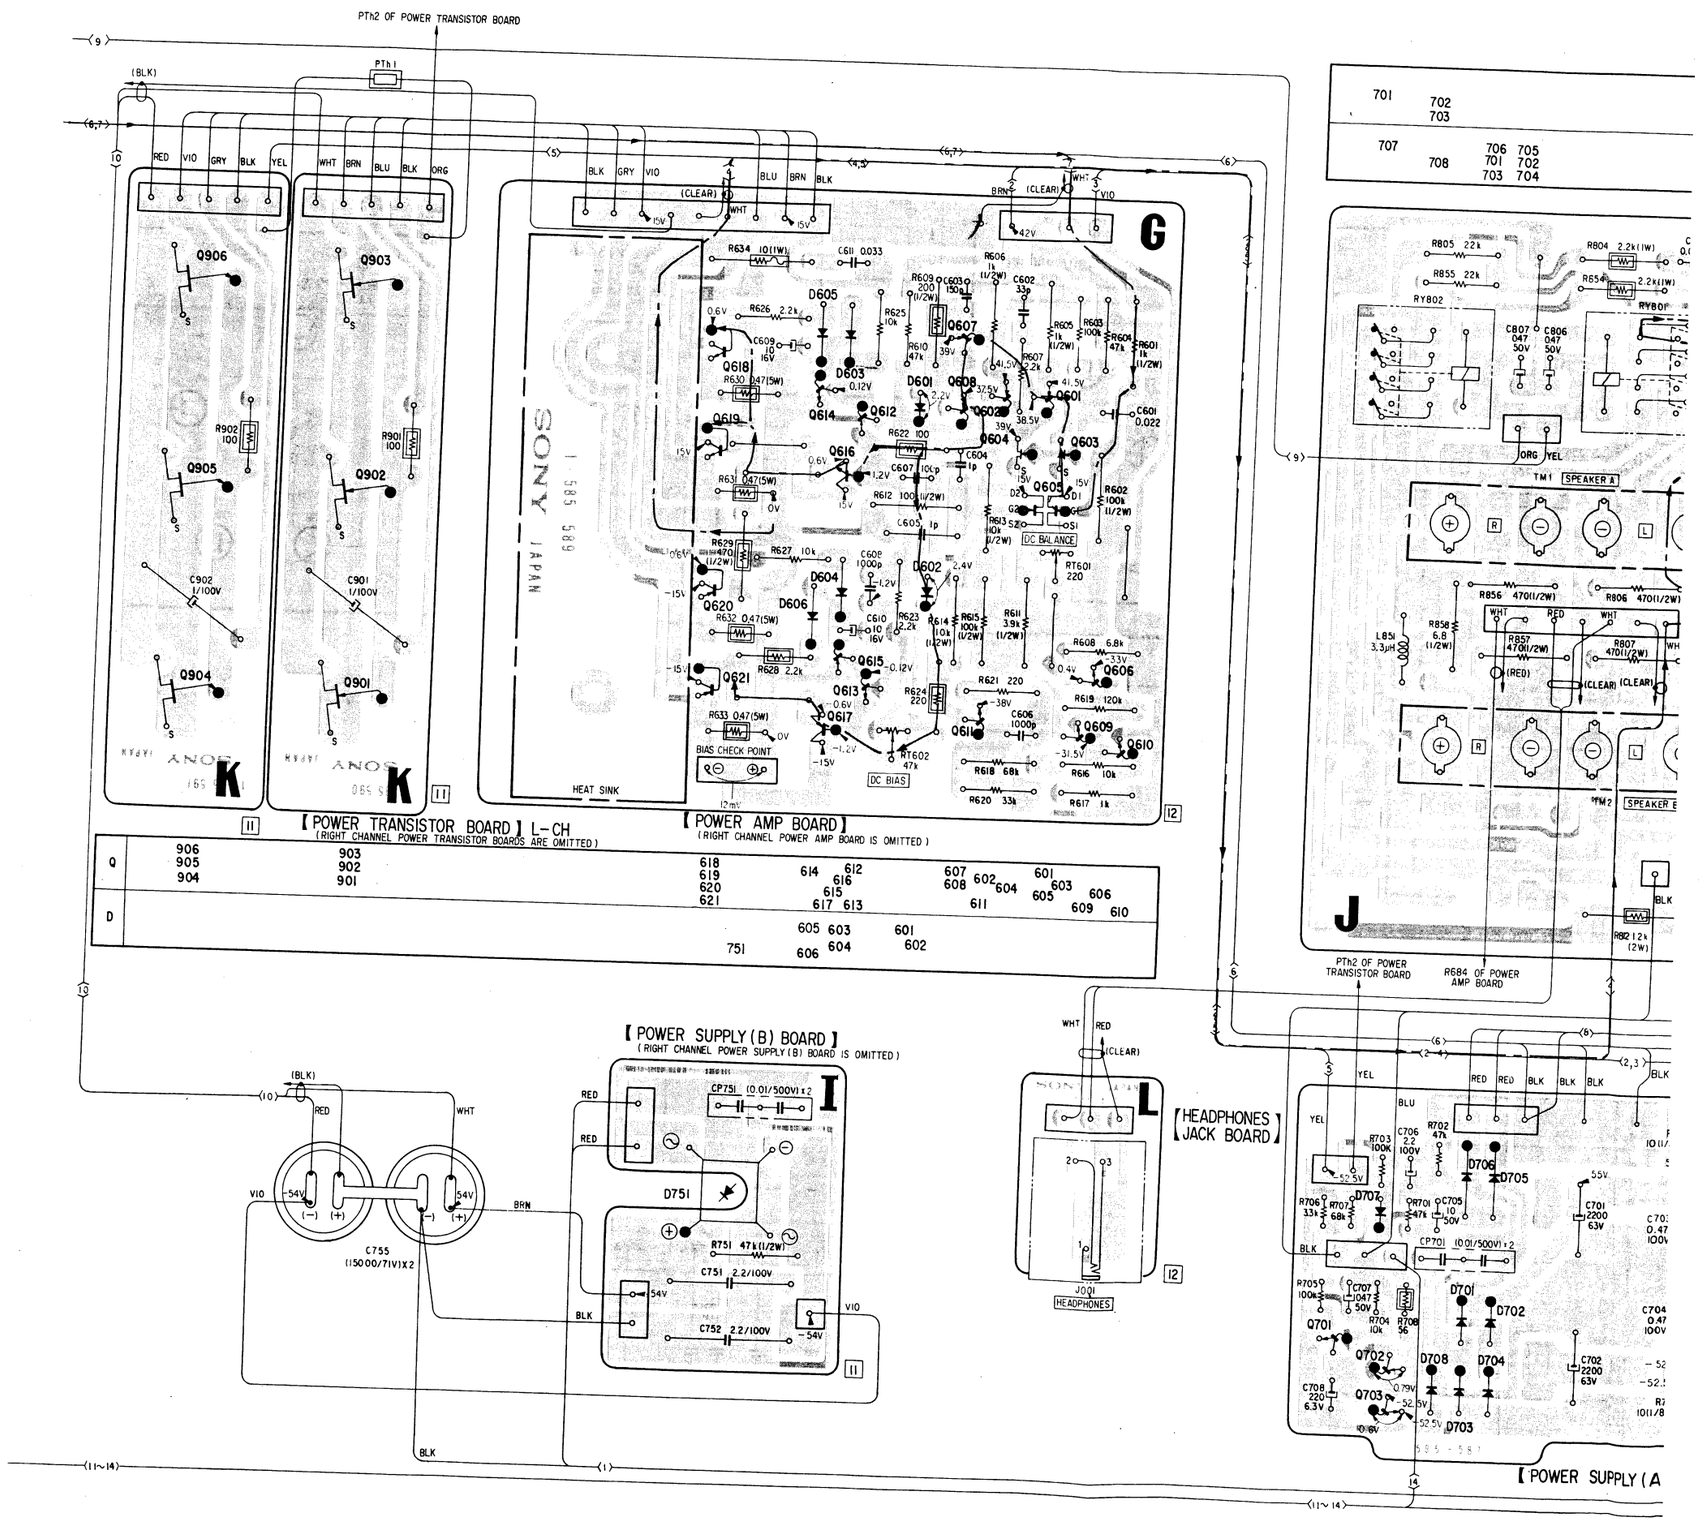

B C D E F G H I

PTh2 OF POWER TRANSISTOR BOARD

PTh1

WHT BRN BLU BLK ORG

BLK GRY VIO (CLEAR) WHT BLU BRN BLK BRN (CLEAR) WHT VIO

Q903 Q902 Q901 R901 100 C901 1/100V

SONY 1 585 589 JAPAN

G

R634 10(1W) C611 0.033 R606 1k (1/2W) R609 200 (1/2W) C603 150p C602 33p R605 1k (1/2W) R603 100k R604 47k R601 1k (1/2W) C601 0.022

D605 D603 0.12V D601 2.2V D602 2.4V D604 D606 D615 -0.12V D613 D617 D611 D609 D610

Q618 Q619 Q614 Q612 Q616 Q607 39V Q608 37.5V Q602 38.5V Q604 Q603 Q605 Q601 41.5V

R630 0.47(5W) R622 100 C607 100p C604 1p R612 100 (1/2W) R613 510 (1/2W) R602 100k (1/2W) DC BALANCE RT601 220

R629 470 (1/2W) R627 10k C608 1000p C610 10 16V R623 2.2k R614 10k (1/2W) R615 100k (1/2W) R611 3.9k (1/2W) R608 6.8k R606 33V

Q620 Q621 R632 0.47(5W) R628 2.2k Q613 Q617 Q611 R633 0.47(5W) BIAS CHECK POINT RT602 47k DC BIAS

R624 220 R621 220 C606 1000p R619 120k R618 68k R616 10k R620 33k R617 15k

HEAT SINK 12mV

11 12

【POWER AMP BOARD】
(RIGHT CHANNEL POWER AMP BOARD IS OMITTED)

【POWER TRANSISTOR BOARD】L-CH
(RIGHT CHANNEL POWER TRANSISTOR BOARDS ARE OMITTED)

903	618	614 612	607 602	601		
902	619	616	608 604	603	606	
901	620	615	605	609	610	
	621	617 613	611			
		605 603	601			
	751	606 604	602			

701	702 703					706 707 711	708	803 851 709	802 705 709	704 710		801			Q
707	708	706 705 701 702 703 704						711 851 709 710 712	852		801		802		D

【SPEAKER OUTPUT BOARD】

R805 22k R855 22k R804 2.2k(1W) R854 2.2k(1W) C803 0.0056 C853 0.0056 C852 1/50V C802 1/50V R853 39 R803 39

RY802 RY801 Q851 Q801 METER (R) METER (L) RT851 100k RT801 100k

C807 047 50V C806 047 50V R851 10k R852 36k R801 10k R802 3.6k

D852 D802 T851 5-10k T801 5-10k C851 470p C801 470p D851 D801

Q803 Q802 C805 470 6.3V R810 4.7k R811 10k

TM1 SPEAKER A

R856 470(1/2W) R806 470(1/2W) R858 6.8 (1/2W) R857 470(1/2W) R807 470(1/2W) R808 6.8 (1W) L851 3.3μH L801 3.3μH

CB801 4A CB802 4A

TM2 SPEAKER B

C808 0.47 50V RY803 R813 1(5W) F801 109°C,10A R814 1(5W) R812 1.2k (2W)

J

PTh2 OF POWER TRANSISTOR BOARD R684 OF POWER AMP BOARD

【SPEAKER OUTPUT BOARD】

【POWER SUPPLY(B) BOARD】
(RIGHT CHANNEL POWER SUPPLY(B) BOARD IS OMITTED)

(BLK) RED WHT -54V (-) (+) 54V (-) (+) C755 (15000/71V)X2 BRN

RED RED I D751 CP751 (0.01/500V) x2 R751 47k(1/2W) C751 2.2/100V C752 2.2/100V 54V -54V VIO BLK

11

WHT RED (CLEAR) L JQ01 HEADPHONES 2 Q3 1 12

【HEADPHONES JACK BOARD】

【POWER SUPPLY(A) BOARD】

YEL BLU BLK RED RED BLK BLK BLK BLK BLK BLK BLK BLK

R703 100K C706 22 100V R702 47k D706 D705 D707 R706 33k R707 68k R701 47k C705 10 50V CP701 (0.01/500V) x2

C701 2200 63V C703 0.47 100V C712 220 16V D709 R709 3.3k D711 R711 10(1/8W) Q705 Q704 C713 40 50V R712 1k R713 10k(1/2W) R721 820 R714 3.6k (1/2W)

Q707 Q706 Q708 D710 C717 220 16V R719 3.6k (1/2W) R720 10k(1/2W) C704 0.47 100V Q711 Q710 C718 10 50V Q709 R718 1k R717 10(1/8W) D712 R715 3.3k

R705 100k C707 047 50V R704 10k R708 56 Q701 Q702 Q703 D701 D702 D708 D704 D703 C708 220 6.3V C702 2200 63V

H

14

R685 R686 POWER AMP BOARD(R-CH)

【POWER SUPPLY(A) BOARD】

(1)~14 (1)~13

~AC IN CNJ1 BRN YEL GRN/YEL WHT BLU VIO

SI3 POWER

【SPEAKER OUTPUT BOARD】 UK MODEL RED RED

【POWER SUPPLY(B) BOARD】R-CH RED PT1 240V RED VIO 220V BLK WHT 0V RED PT2 240V RED VIO 220V BLK WHT 0V RED PT3 VIO BLK WHT BLU RED BLU D752 GROUND OF C756

8

~AC IN CNJ1 YEL BRN GRN/YEL WHT BLU VIO

SI3 POWER

【POWER SUPPLY(B) BOARD】R-CH AEP MODEL RED PT2 240V RED VIO 220V BLK WHT 0V RED PT1 240V RED VIO 220V BLK WHT 0V RED PT3 VIO BLK WHT BLU RED BLU D752

M851 WATTS/8Ω R (CLEAR) RED

M801 WATTS/8Ω L (CLEAR) WHT BLU

1 2 3 4 5

4-5. SCHEMATIC DIAGRAM — Power Amplifier and Power Supply Sections —

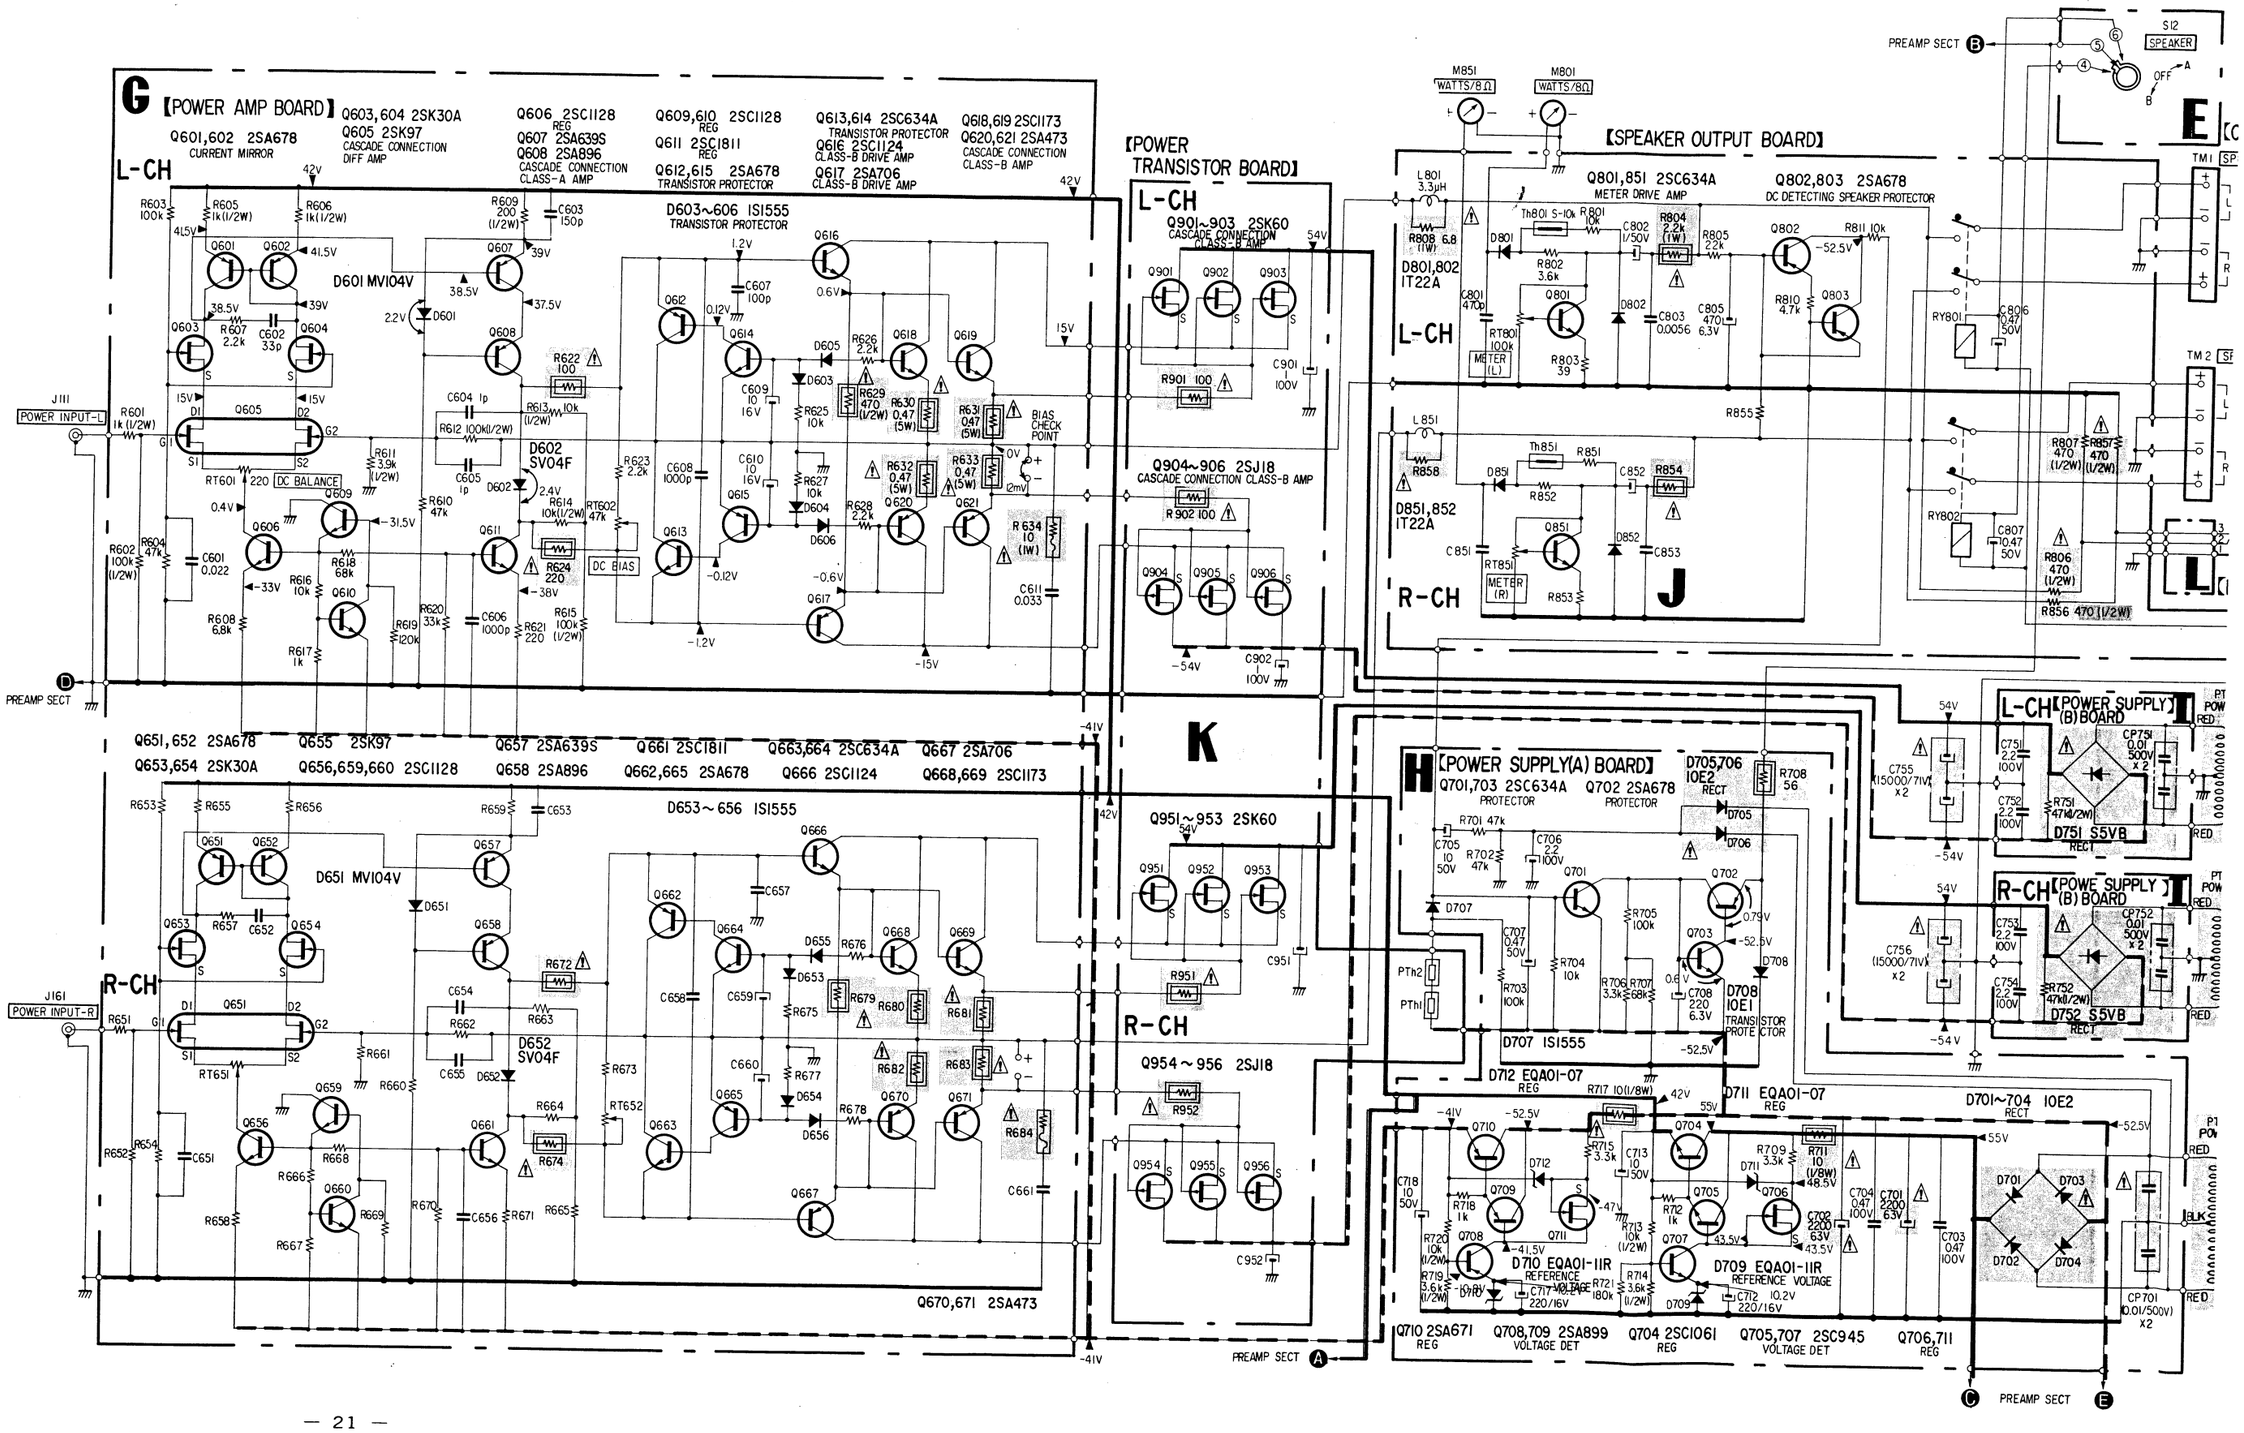

TA-F7/TA-F7B

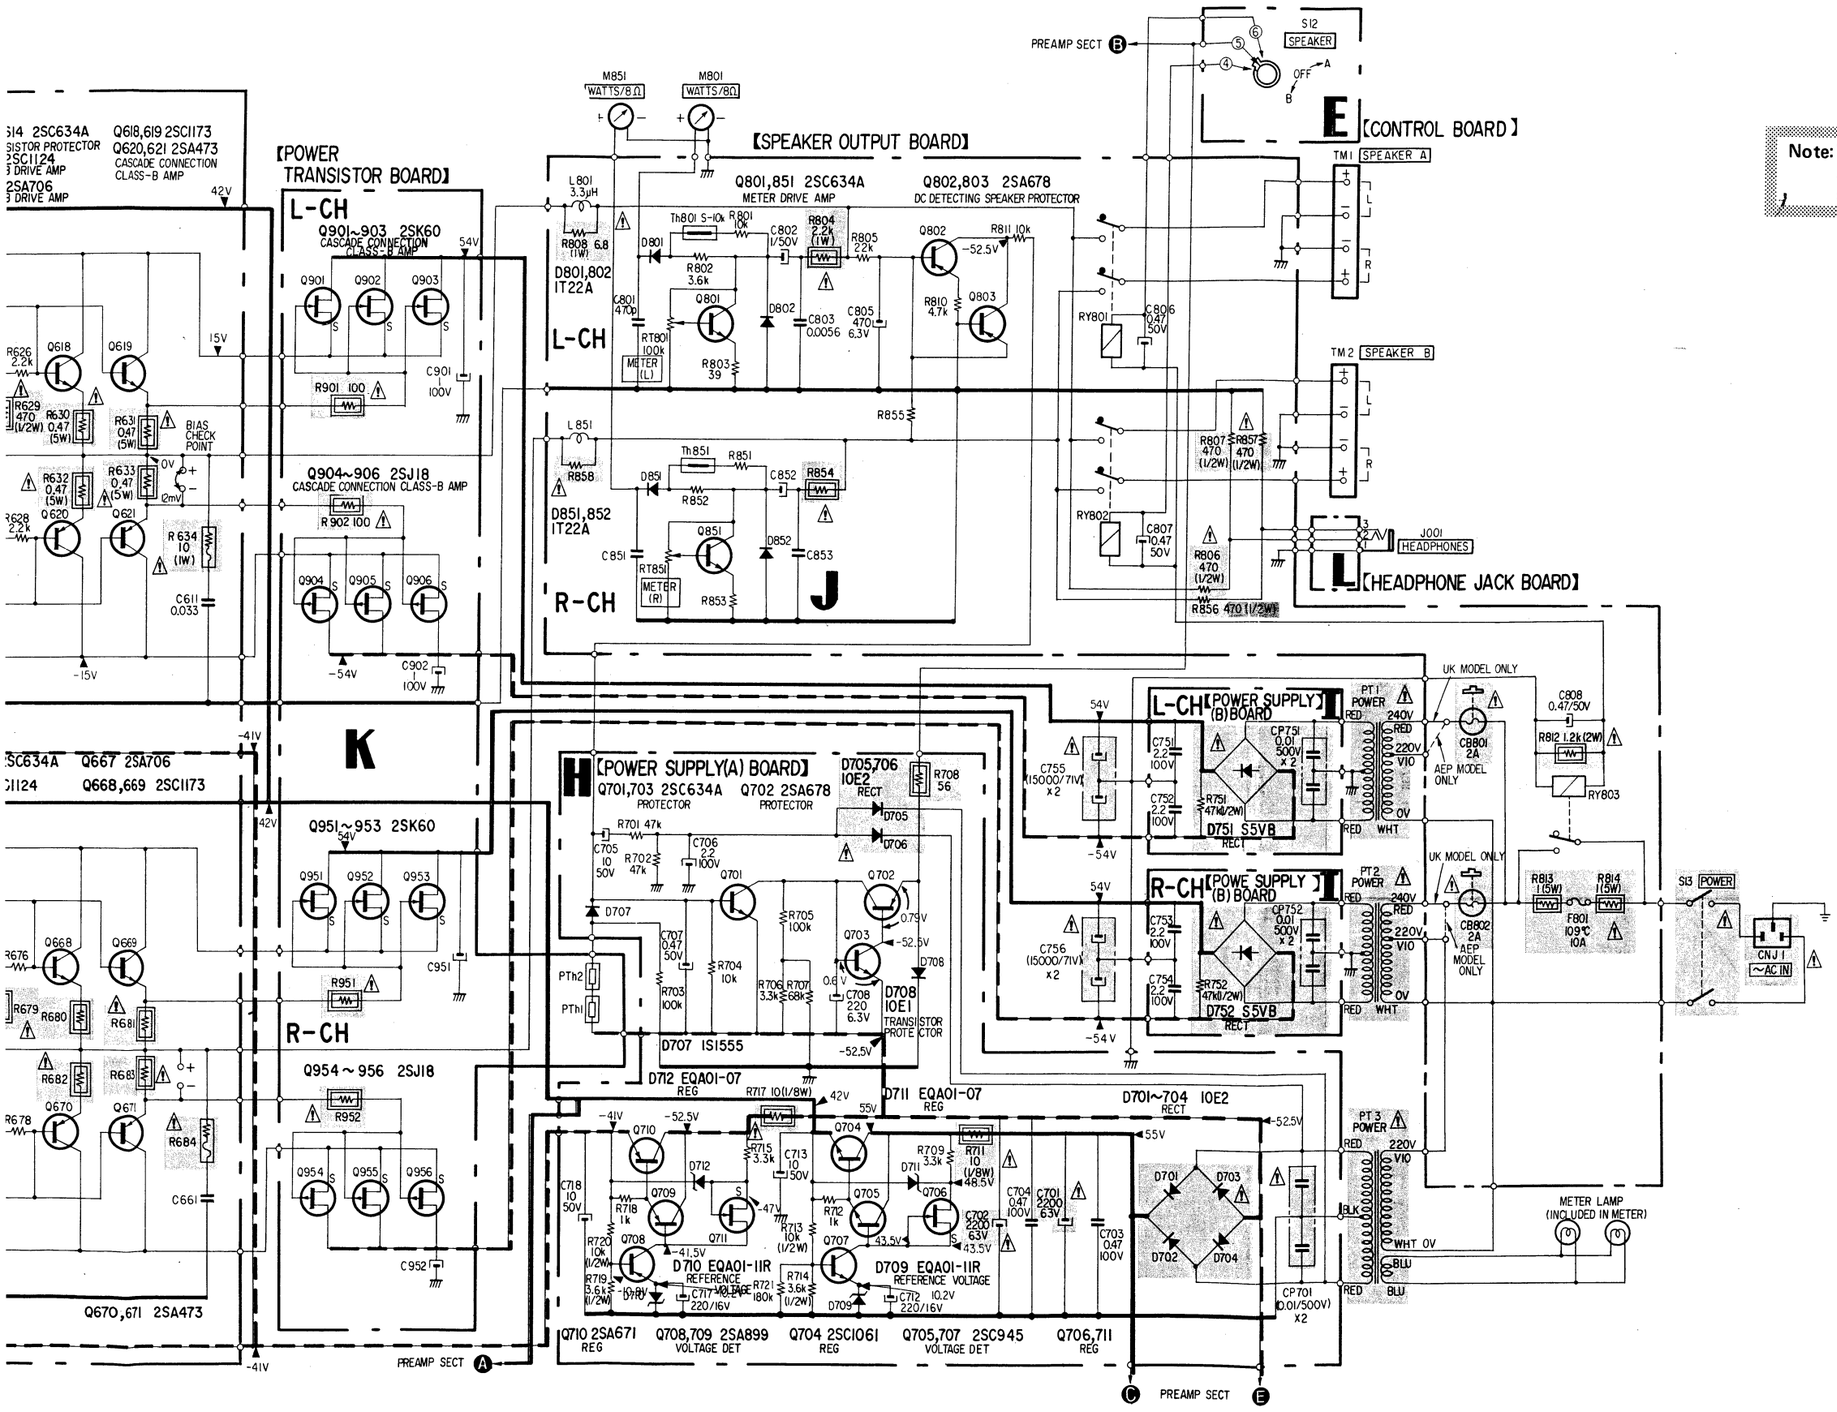

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

Note:

- Components for right channel have same values as for left channel. Reference numbers are coded from.
- All capacitors are in μF unless otherwise noted. pF = μμF 50WV or less are not indicated except for electrolytics.
- All resistors are in ohms, ¼W unless otherwise noted. kΩ = 1000Ω, MΩ = 1000 kΩ
- : nonflammable resistor.
- : fusible resistor.
- : B+ bus.
- : B- bus.
- : panel designation.
- : adjustment for repair.
- Readings are taken under no signal conditions with a VOM (20 kΩ/V).
- Switch

Ref. No.	Switch	Position
S12	SPEAKER	OFF
S13	POWER	OFF

(1)

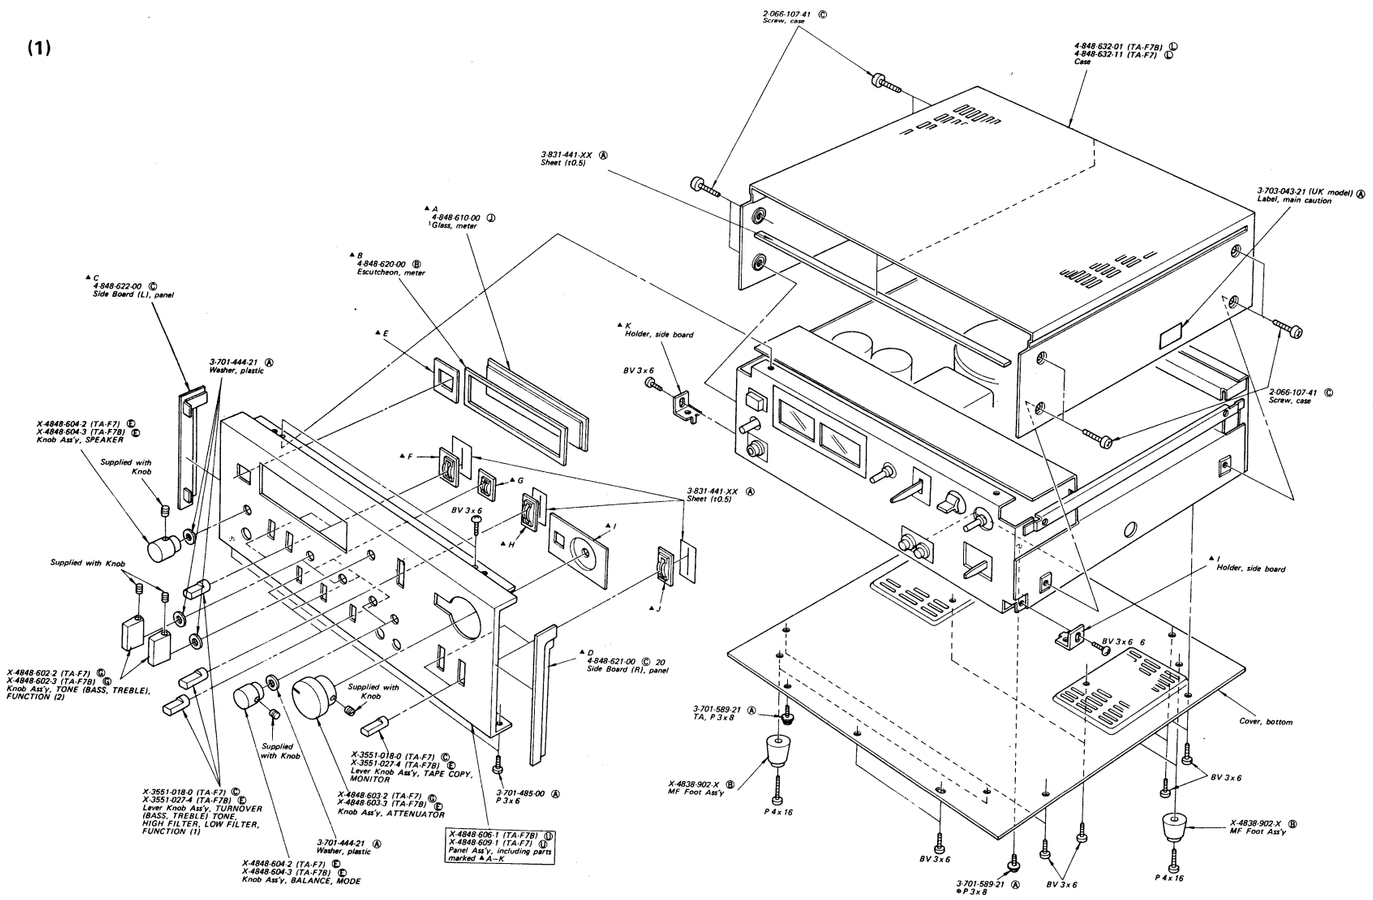

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
  (–) = slotted head
- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

(2)

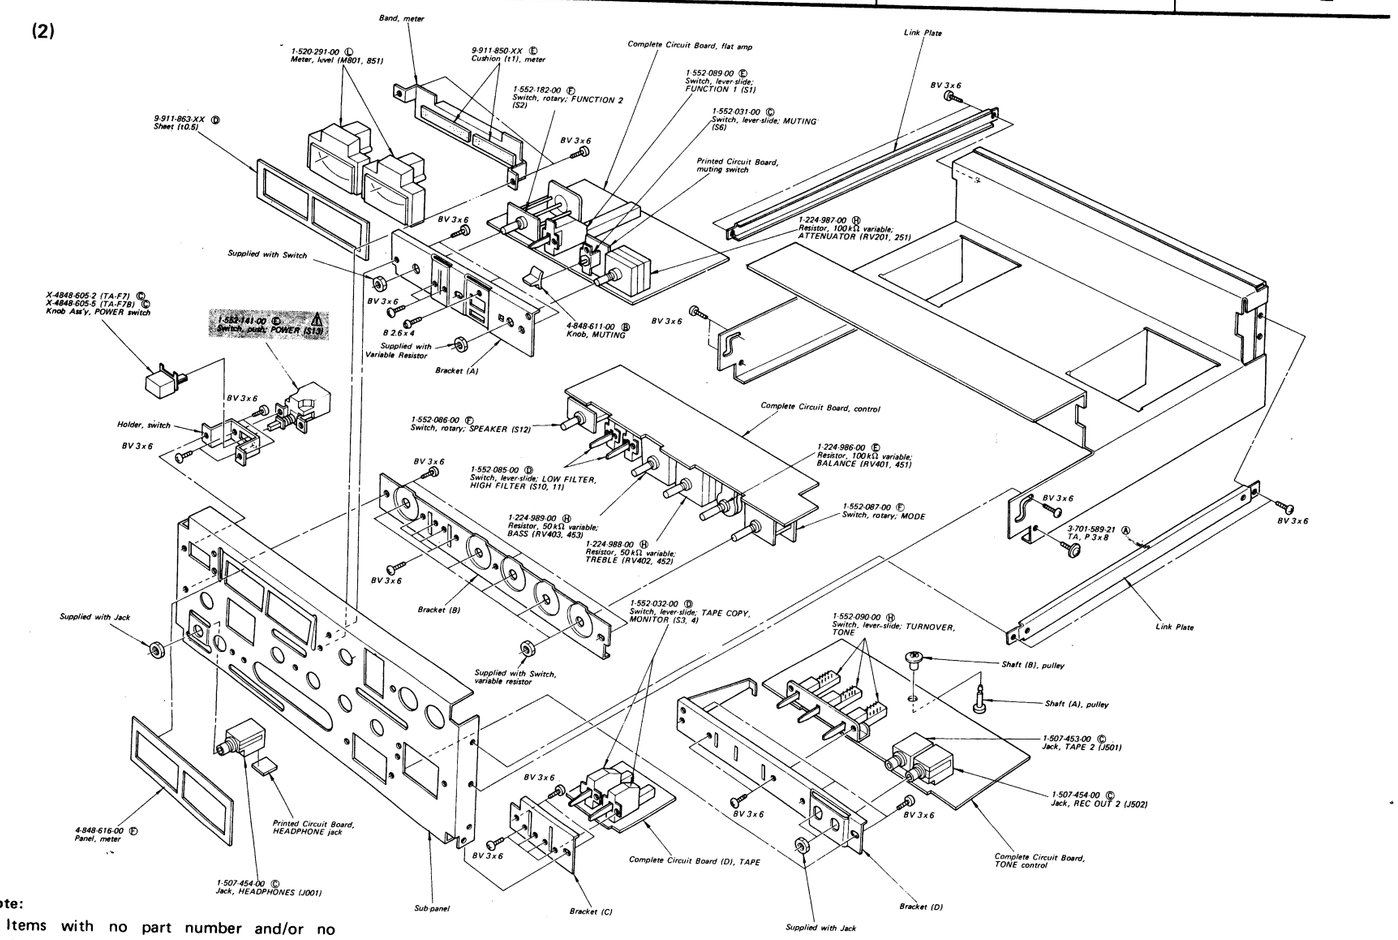

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
  (–) = slotted head
- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

(3)



(–) = slotted head

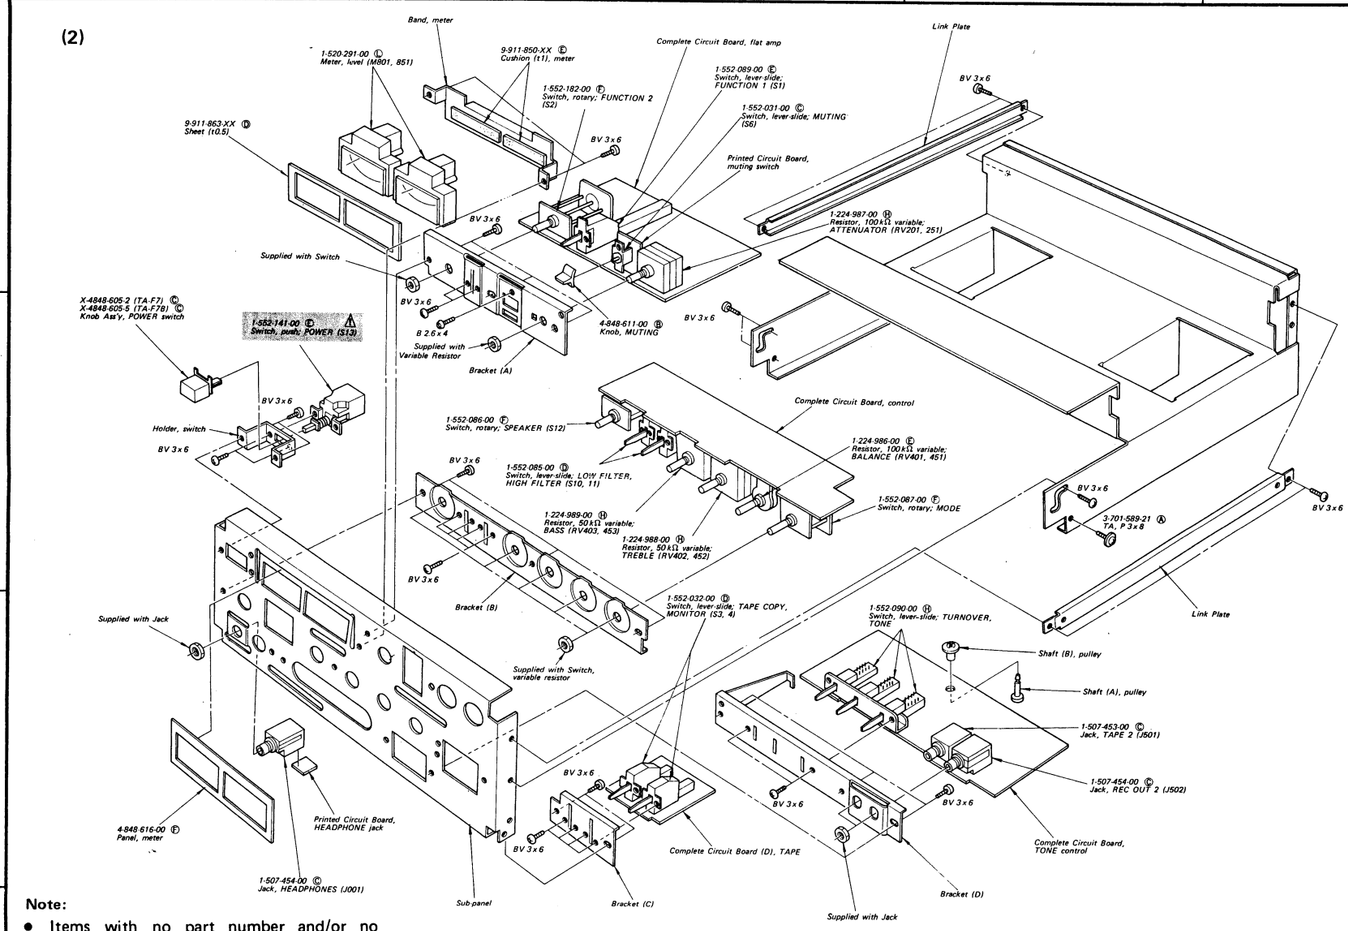

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
  (–) = slotted head
- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

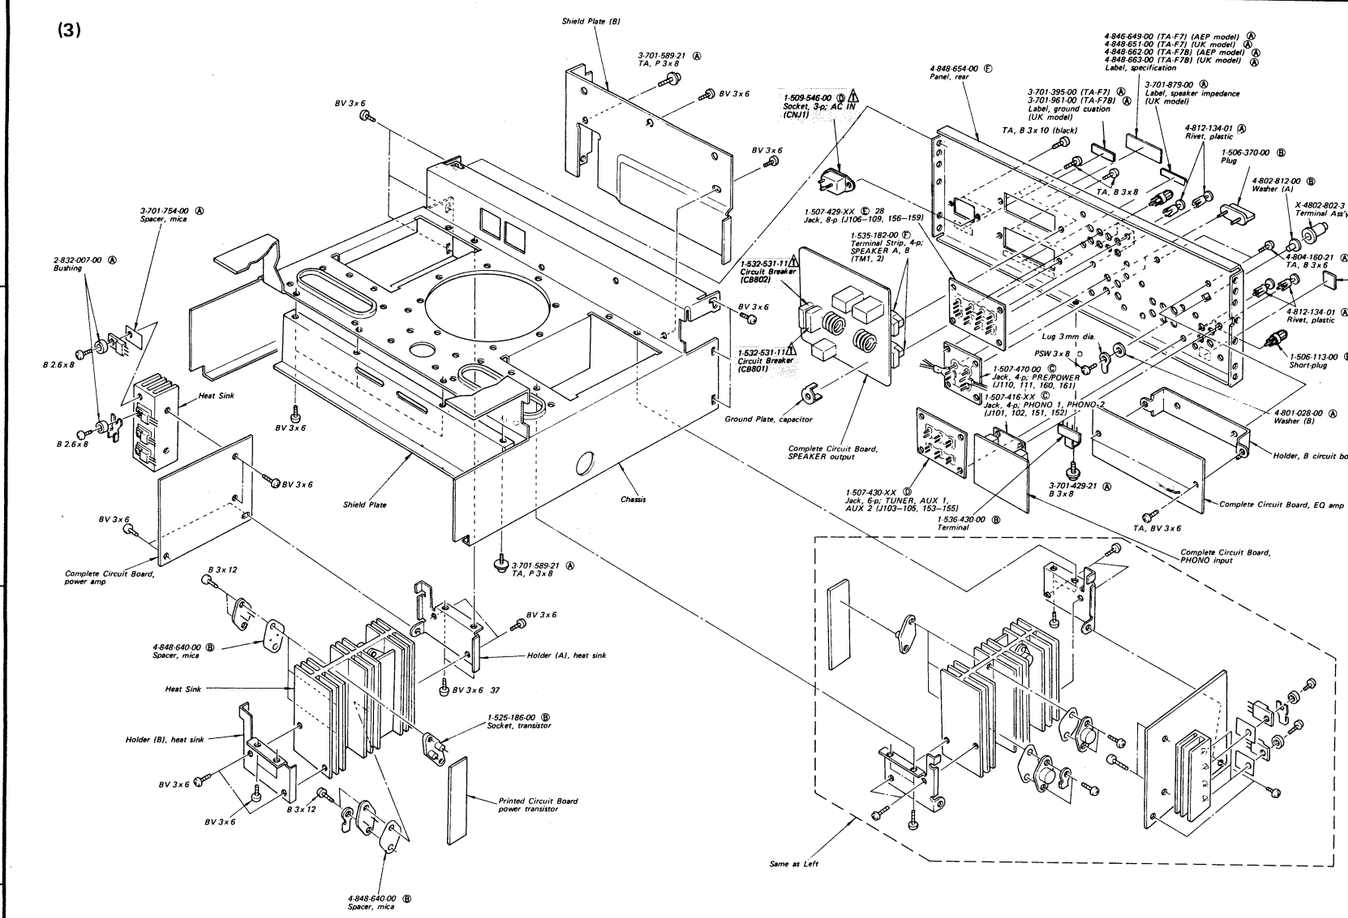

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
  (–) = slotted head
- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

(4)

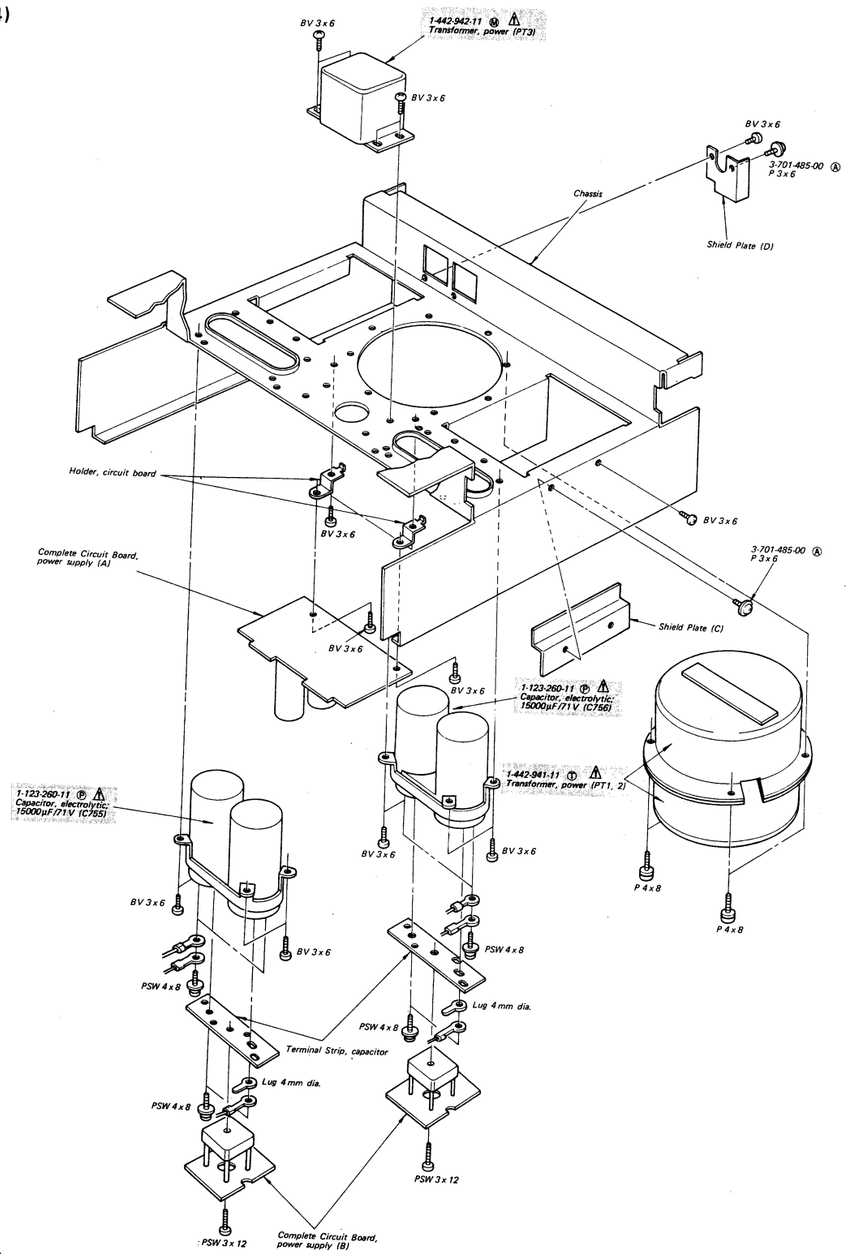

Note:

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- All screws are Phillips (cross recess) type unless otherwise noted.
  (–) = slotted head
- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

SECTION 6
ELECTRICAL PARTS LIST

- Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.	Description
		PRINTED CIRCUIT BOARD
	1-585-589-12	Ⓔ Power Amp
		SEMICONDUCTORS
		Transistors
Q101,151		Ⓕ 2SK97
Q102–104		Ⓒ 2SC1128
Q152–154		
⇒ Q105,155		Ⓒ 2SK43-2
Q106,107		Ⓒ 2SA639S
Q156,157		
Q108,158		Ⓒ 2SA896
Q109,159		Ⓒ 2SC1811
Q201,202		Ⓕ 2SK43-3A
Q251,252		
Q203,253		Ⓒ 2SC1128
Q204,254		Ⓒ 2SA896
Q205,206		Ⓒ 2SC1128
Q255,256		
Q207,257		Ⓒ 2SC1811
Q401,451		Ⓑ 2SC1636
⇒ Q501,551		Ⓕ 2SK43-3A
Q502,552		Ⓒ 2SA896
Q503,553		Ⓒ 2SC1811
Q504,554		Ⓒ 2SC1128
Q505		Ⓓ 2SC1061
Q555		Ⓔ 2SA671
⇒ Q506		Ⓑ 2SC634A
Q556		Ⓒ 2SA899
Q507		Ⓒ 2SA899
⇒ Q557		Ⓑ 2SC634A
⇒ Q508		Ⓑ 2SC634A
Q558		Ⓒ 2SA899
⇒ Q509,559		Ⓒ 2SK42-2
Q601,602		Ⓒ 2SA678
Q651,652		

Ref. No.	Part No.	Description
⇒ Q603,604		Ⓑ 2SK30A-GR
⇒ Q653,654		
Q605,655		Ⓕ 2SK97
Q606,656		Ⓒ 2SC1128
Q607,657		Ⓒ 2SA639S
Q608,658		Ⓒ 2SA896
Q609,659		Ⓒ 2SC1128
Q610,660		
Q611,661		Ⓒ 2SC1811
Q612,662		Ⓒ 2SA678
Q613,663		Ⓑ 2SC634A
Q614,664		
Q615,665		Ⓒ 2SA678
Q616,666		Ⓒ 2SC1124
Q617,667		Ⓓ 2SA706
Q618,668		Ⓒ 2SC1173
Q619,669		
Q620,670		Ⓒ 2SA473
Q621,671		
Q701		Ⓑ 2SC634A
Q702		Ⓒ 2SA678
Q703		Ⓑ 2SC634A
Q704		Ⓓ 2SC1061
⇒ Q705		Ⓑ 2SC634A
⇒ Q706		Ⓒ 2SK42-2
Q707		Ⓑ 2SC634A
Q708,709		Ⓒ 2SA899
Q710		Ⓔ 2SA671
⇒ Q711		Ⓒ 2SK42-2
Q801,851		Ⓑ 2SC634A
Q802,803		Ⓒ 2SA678
Q901–903		Ⓙ 2SK60
Q951–953		
Q904–906		Ⓚ 2SJ18
Q954–956		
		Diodes
D101,151		Ⓑ 1S1555

- ⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

SECTION 6
ELECTRICAL PARTS LIST

• Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.	Description
		PRINTED CIRCUIT BOARD
	1-585-589-12	Ⓔ Power Amp
		SEMICONDUCTORS
		Transistors
Q101,151		Ⓕ 2SK97
Q102–104, Q152–154		Ⓒ 2SC1128
⇒ Q105,155		Ⓒ 2SK43-2
Q106,107, Q156,157		Ⓒ 2SA639S
Q108,158		Ⓒ 2SA896
Q109,159		Ⓒ 2SC1811
Q201,202, Q251,252		Ⓕ 2SK43-3A
Q203,253		Ⓒ 2SC1128
Q204,254		Ⓒ 2SA896
Q205,206, Q255,256		Ⓒ 2SC1128
Q207,257		Ⓒ 2SC1811
Q401,451		Ⓑ 2SC1636
⇒ Q501,551		Ⓕ 2SK43-3A
Q502,552		Ⓒ 2SA896
Q503,553		Ⓒ 2SC1811
Q504,554		Ⓒ 2SC1128
Q505		Ⓓ 2SC1061
Q555		Ⓔ 2SA671
⇒ Q506		Ⓑ 2SC634A
Q556		Ⓒ 2SA899
Q507		Ⓒ 2SA899
⇒ Q557		Ⓑ 2SC634A
⇒ Q508		Ⓑ 2SC634A
Q558		Ⓒ 2SA899
⇒ Q509,559		Ⓒ 2SK42-2
Q601,602, Q651,652		Ⓒ 2SA678
⇒ Q603,604, ⇒ Q653,654		Ⓑ 2SK30A-GR
Q605,655		Ⓕ 2SK97
Q606,656		Ⓒ 2SC1128
Q607,657		Ⓒ 2SA639S
Q608,658		Ⓒ 2SA896
Q609,659, Q610,660		Ⓒ 2SC1128
Q611,661		Ⓒ 2SC1811
Q612,662		Ⓒ 2SA678
Q613,663, Q614,664		Ⓑ 2SC634A
Q615,665		Ⓒ 2SA678
Q616,666		Ⓒ 2SC1124
Q617,667		Ⓓ 2SA706
Q618,668, Q619,669		Ⓒ 2SC1173
Q620,670, Q621,671		Ⓒ 2SA473
Q701		Ⓑ 2SC634A
Q702		Ⓒ 2SA678
Q703		Ⓑ 2SC634A
Q704		Ⓓ 2SC1061
⇒ Q705		Ⓑ 2SC634A
⇒ Q706		Ⓒ 2SK42-2
Q707		Ⓑ 2SC634A
Q708,709		Ⓒ 2SA899
Q710		Ⓔ 2SA671
⇒ Q711		Ⓒ 2SK42-2
Q801,851		Ⓑ 2SC634A
Q802,803		Ⓒ 2SA678
Q901–903, Q951–953		Ⓙ 2SK60
Q904–906, Q954–956		Ⓚ 2SJ18
		Diodes
D101,151		Ⓑ 1S1555

• ⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

• Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.	Description
⇒ D501,551		Ⓑ EQB01-07
⇒ D601,651		Ⓒ KB462S
D602,652		Ⓒ SV04S
D603–606, D653–656		Ⓑ 1S1555
D701–706 ⚠		Ⓑ 10E2
D707		Ⓑ 1S1555
⇒ D708		Ⓑ 10E2
⇒ D709,710		Ⓑ EQB01-11Z
⇒ D711,712		Ⓑ EQB01-07
D751,752 ⚠		Ⓕ S5VB20
D801,851, D802,852		Ⓑ 1T22M
		THERMISTORS
Th801,851	1-800-202-XX	Ⓐ Thermistor, S-10K
PTh1,2	1-800-427-00	Ⓑ Thermistor
		COILS
L401,451	1-407-879-00	Ⓑ 33 mH, microinductor
L801,851	1-420-879-00	Ⓑ Coil
		TRANSFORMERS
PT1,2 ⚠	1-442-941-11	Ⓣ Power
PT3 ⚠	1-442-942-11	Ⓜ Power
		CAPACITORS

All capacitors are in μF and ceramic unless otherwise noted.
50WV or less are not indicated except for electrolytics. pF = μμF, elect = electrolytic

C001,002	1-119-216-11	Ⓑ 33	25V	elect
C101,151	1-102-963-11	Ⓐ 33p		

⇒: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Ref. No.	Part No.	Description		
C102,152	1-101-005-11	Ⓐ 0.022		
C103,153, C104,154	1-102-973-11	Ⓐ 100p		
C105,155	1-130-131-11	Ⓑ 1600p	100V	polyethylene
C106,156	1-130-132-11	Ⓑ 5600p	100V	polyethylene
C107,157	1-131-217-11	Ⓑ 2.2	35V	tantalum
C108,158	1-102-959-11	Ⓐ 22p		
C109,159	1-130-122-11	Ⓑ 1000p	100V	polyethylene
C110,160, C111,161	1-123-250-11	Ⓑ 2.2	100V	elect
C112,162	1-130-133-11	Ⓑ 56000p	100V	polyethylene
C201,251	1-102-971-11	Ⓐ 82p		
C202,252	1-102-824-11	Ⓐ 470p		
C203,253, C204,254	1-131-295-11	Ⓒ 100	6.3V	tantalum
C205,255	1-130-133-11	Ⓑ 56000p	100V	polyethylene
C208	1-108-227-12	Ⓐ 0.001		mylar
C401,451	1-108-360-12	Ⓐ 0.039		mylar
C402,452	1-108-364-12	Ⓑ 0.18		mylar
C403,453	1-108-581-12	Ⓑ 0.012		mylar
C404,454, C405,455	1-108-254-12	Ⓑ 0.22		mylar
C501,551	1-102-115-11	Ⓐ 560p		
C502,552, C503,553	1-108-228-12	Ⓐ 0.0015		mylar
C504,554, C505,555	1-108-237-12	Ⓐ 0.0068		mylar
C506,556	1-108-360-12	Ⓐ 0.039		mylar
C507,557	1-108-364-12	Ⓑ 0.18		
C508,558	1-102-125-11	Ⓐ 4700p		
C509,559, C510,560	1-131-239-11	Ⓑ 6.8	35V	tantalum
C511,561	1-130-083-11	Ⓒ 1	100V	polyethylene
C514,564	1-121-411-11	Ⓑ 47	50V	elect
C517,567	1-130-086-11	Ⓑ 0.47	100V	polyethylene
C601,651	1-101-005-11	Ⓐ 0.022		
C602,652	1-102-963-11	Ⓐ 33p		
C603,653	1-101-361-11	Ⓐ 150p		
C604,654, C605,655	1-102-934-11	Ⓐ 1p		

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

Ref. No.	Part No.		Description		
C606,656	1-101-001-11	Ⓐ	1000p		
C607,657	1-102-973-11	Ⓐ	100p		
C608,658	1-101-001-11	Ⓐ	1000p		
C609,659, C610,660	1-121-651-11	Ⓐ	10	16V	elect
C611,661	1-108-244-12	Ⓐ	0.033		mylar
C701,702 ⚠	1-123-261-11	Ⓔ	2200	63V	elect
C703,704	1-130-086-11	Ⓑ	0.47	100V	polyethylene
C705	1-123-183-11	Ⓐ	10	50V	elect
C706	1-123-250-11	Ⓑ	2.2	100V	elect
C707	1-121-726-11	Ⓐ	0.47	50V	elect
C708	1-121-419-11	Ⓑ	220	6.3V	elect
C712,717	1-121-421-11	Ⓑ	220	16V	elect
C713,718	1-121-738-11	Ⓑ	10	50V	elect
C751–754	1-130-084-11	Ⓓ	2.2	100V	polyethylene
C755,756 ⚠	1-123-260-11	Ⓟ	15000	71V	elect
C801,851	1-102-824-11	Ⓐ	470p		
C802,852	1-121-391-11	Ⓐ	1	50V	elect
C803,853	1-108-355-12	Ⓐ	0.0056		mylar
C805	1-121-424-11	Ⓑ	470	6.3V	elect
C806–808	1-121-726-11	Ⓐ	0.47	50V	elect
C901,951, C902,952	1-119-372-11		1	100V	elect

RESISTORS

All resistors are in ohms. Common ¼W carbon resistors are omitted.
Check schematic diagram for values.

Ref. No.	Part No.				
R101,151	1-244-914-11	Ⓐ	51k	½W	
R102,152	1-244-873-11	Ⓐ	1k	½W	
R103,153	1-244-864-11	Ⓐ	430	½W	
R104,154	1-244-909-11	Ⓐ	33k	½W	
R105,155	1-244-865-11	Ⓐ	470	½W	
R107,157	1-244-873-11	Ⓐ	1k	½W	
R108,158	1-214-172-11	Ⓑ	47k	¼W	metal oxide
R109,159	1-214-473-11	Ⓑ	576k	½W	metal oxide
R116,166	1-244-945-11	Ⓐ	1M	½W	
R117,167	1-244-909-11	Ⓐ	33k	½W	
R118,168	1-244-873-11	Ⓐ	1k	½W	

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

Note: Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.		Description		
R120,170	1-244-873-11	Ⓐ	1k	½W	
R202,252	1-244-919-11	Ⓐ	2k	½W	
R203,253	1-244-945-11	Ⓐ	1M	½W	
R204,254	1-244-873-11	Ⓐ	1k	½W	
R205,255, R206,256	1-244-905-11	Ⓐ	22k	½W	
R208,258	1-244-877-11	Ⓐ	1.5k	½W	
R209,259	1-244-897-11	Ⓐ	10k	½W	
R214,264	1-244-873-11	Ⓐ	1k	½W	
R219	1-244-881-11	Ⓐ	2.2k	½W	
R301,351, R302,352	1-244-897-11	Ⓐ	10k	½W	
R509,559	1-244-873-11	Ⓐ	1k	½W	
R510,560	1-244-945-11	Ⓐ	1M	½W	
R511,561	1-244-893-11	Ⓐ	6.8k	½W	
R512,562	1-244-881-11	Ⓐ	2.2k	½W	
R513,563	1-244-897-11	Ⓐ	10k	½W	
R514,564	1-244-861-11	Ⓐ	330	½W	
R520,570	1-244-897-11	Ⓐ	10k	½W	
R521,571	1-244-856-11	Ⓐ	200	½W	
R524,574 ⚠	1-212-869-11	Ⓐ	33	¼W	fusible
R527,577 ⚠	1-212-990-11	Ⓐ	220	½W	fusible
R601,651	1-244-873-11	Ⓐ	1k	½W	
R602,652	1-244-921-11	Ⓐ	100k	½W	
R605,655, R606,656	1-244-873-11	Ⓐ	1k	½W	
R611,661	1-244-887-11	Ⓐ	3.9k	½W	
R612,662	1-244-921-11	Ⓐ	100k	½W	
R613,663, R614,664	1-244-897-11	Ⓐ	10k	½W	
R615,665	1-244-921-11	Ⓐ	100k	½W	
R622,672 ⚠	1-211-522-11	Ⓐ	100	¼W	
R624,674 ⚠	1-211-530-11	Ⓐ	220	¼W	
R629,679 ⚠	1-211-630-11	Ⓐ	470	½W	
R630–633, R680–683 ⚠	1-217-158-11	Ⓐ	0.47	5W	metal oxide
R634,684 ⚠	1-217-481-11	Ⓑ	10	1W	fusible
R708 ⚠	1-211-516-11	Ⓐ	56	¼W	

Note: Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.		Description		
R711,717 ⚠	1-211-409-11	Ⓐ	10	1/8W	
R713,720	1-244-897-11	Ⓐ	10k	½W	
R714,719	1-244-886-11	Ⓐ	3.6k	½W	
R751,752 ⚠	1-244-913-11	Ⓐ	47k	½W	
R804,854 ⚠	1-213-147-11	Ⓐ	2.2k	1W	metal oxide
R806,856, R807,857 ⚠	1-244-865-11	Ⓐ	470	½W	
R808,858 ⚠	1-212-370-11	Ⓐ	6.8	1W	
R812 ⚠	1-206-666-11	Ⓐ	1.2k	2W	metal oxide
R813,814 ⚠	1-217-160-11	Ⓐ	1	5W	metal oxide
R901,951, R902,952 ⚠	1-211-522-11	Ⓐ	100	¼W	
RT601,651	1-224-487-00	Ⓑ	220		adjustable
RT602,652	1-224-661-00	Ⓑ	47k		adjustable
RT801,851	1-224-492-00	Ⓑ	100k		adjustable
RV201,251	2-224-987-00	Ⓗ	100k, variable; ATTENUATOR		
RV401,451	1-224-986-00	Ⓔ	100k, variable; BALANCE		
RV402,452	1-224-988-00	Ⓗ	50k, variable; TREBLE		
RV403,453	1-224-989-00	Ⓗ	51k, variable; BASS		

SWITCHES

S1	1-552-089-00	Ⓔ	Lever Slide, FUNCTION (1)
S2	1-552-182-00	Ⓕ	Rotary Slide, FUNCTION (2)
S3,4	1-552-032-00	Ⓓ	Lever Slide, TAPE COPY, MONITOR
S5	1-552-087-00	Ⓕ	Rotary, MODE
S6	1-552-031-00	Ⓒ	Lever Slide, MUTING
S7–9	1-552-090-00	Ⓗ	Lever Slide, TURNOVER (BASS, TREBLE)/TONE
S10,11	1-552-085-00	Ⓓ	Lever Slide, LOW FILTER, HIGH FILTER
S12	1-552-086-00	Ⓕ	Rotary, SPEAKER
S13 ⚠	1-552-141-00	Ⓔ	Pushbutton, POWER

JACKS

J001	1-507-454-00	Ⓒ	HEADPHONES
J101,151, J102,152	1-507-416-XX	Ⓒ	4p, PHONO 1, PHONO 2
J103–105, J153–155	1-507-430-XX	Ⓓ	6p, TUNER, AUX 1, AUX 2
J106–109, J156–159	1-507-429-XX	Ⓔ	8p, TAPE 1, TAPE 2 REC OUT 1, REC OUT 2
J110,160, J111,161	1-507-470-00	Ⓒ	4p, PRE/POWER
J501	1-507-453-00	Ⓒ	TAPE 2
J502	1-507-454-00	Ⓒ	REC OUT 2
CNJ	1-509-546-00 ⚠	Ⓓ	3p, socket; AC IN

MISCELLANEOUS

CB801,802	1-532-531-11 ⚠	Ⓒ	Circuit Breaker, 2A
CP701, CP751,752	1-102-355-11 ⚠	Ⓑ	Encapsulated Component
F801	1-532-496-11 ⚠	Ⓒ	Fuse 10A
M801,851	1-520-291-00	Ⓛ	Meter, level
RY001,002	1-515-277-00	Ⓕ	Relay
RY801,802	1-515-257-00	Ⓗ	Relay (TA-F7)
	1-515-293-00	Ⓗ	Relay (TA-F7B)
RY803	1-515-278-00	Ⓕ	Relay
TM1,2	1-535-182-00	Ⓕ	Terminal Strip, 4p; SPEAKER A, B
	1-506-370-00	Ⓑ	Plug
	1-525-186-00	Ⓑ	Socket, transistor
	1-536-430-12	Ⓑ	Terminal Strip

ACCESSORIES & PACKING MATERIALS

Part No.	Description		
1-506-113-00	Ⓑ	Short Plug	
1-534-819-12	Ⓖ	Cord, power (UK model)	
3-701-020-00	Ⓐ	Bag, SS check sheet	
3-701-622-00	Ⓐ	Bag, plastic (UK model)	
3-770-394-11	Ⓚ	Manual, instruction	
4-848-648-00	Ⓑ	Bag, protection	
4-848-659-00	Ⓗ	Carton (TA-F7)	
4-848-664-00	Ⓗ	Carton (TA-F7B)	
4-848-660-00	Ⓓ	Frame	
4-848-661-00	Ⓒ	Cushion, lower	
4-848-658-00	Ⓒ	Cushion, upper	

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

9-958-464

Note: Circled letters (Ⓐ to Ⓩ) are applicable to European models only.

Ref. No.	Part No.		Description	
R711,717	⚠1-211-409-11	Ⓐ	10	1/8W
R713,720	1-244-897-11	Ⓐ	10 k	½W
R714,719	1-244-886-11	Ⓐ	3.6 k	½W
R751,752	⚠1-244-913-11	Ⓐ	47 k	½W
R804,854	⚠1-213-147-11	Ⓐ	2.2 k	1W metal oxide
R806,856 R807,857	⚠1-244-865-11	Ⓐ	470	½W
R808,858	⚠1-212-370-11	Ⓐ	6.8	1W
R812	⚠1-206-666-11	Ⓐ	1.2 k	2W metal oxide
R813,814	⚠1-217-160-11	Ⓐ	1	5W metal oxide
R901,951 R902,952	⚠1-211-522-11	Ⓐ	100	¼W
RT601,651	1-224-487-00	Ⓑ	220	adjustable
RT602,652	1-224-661-00	Ⓑ	47 k	adjustable
RT801,851	1-224-492-00	Ⓑ	100 k	adjustable
RV201,251	2-224-987-00	Ⓗ	100 k, variable; ATTENUATOR	
RV401,451	1-224-986-00	Ⓔ	100 k, variable; BALANCE	
RV402,452	1-224-988-00	Ⓗ	50 k, variable; TREBLE	
RV403,453	1-224-989-00	Ⓗ	51 k, variable; BASS	

SWITCHES

S1	1-552-089-00	Ⓔ Lever Slide, FUNCTION (1)
S2	1-552-182-00	Ⓕ Rotary Slide, FUNCTION (2)
S3,4	1-552-032-00	Ⓓ Lever Slide, TAPE COPY, MONITOR
S5	1-552-087-00	Ⓕ Rotary, MODE
S6	1-552-031-00	Ⓒ Lever Slide, MUTING
S7–9	1-552-090-00	Ⓗ Lever Slide, TURNOVER (BASS, TREBLE)/TONE
S10,11	1-552-085-00	Ⓓ Lever Slide, LOW FILTER, HIGH FILTER
S12	1-552-086-00	Ⓕ Rotary, SPEAKER
S13	⚠1-552-141-00	Ⓔ Pushbutton, POWER

JACKS

J001	1-507-454-00	Ⓒ HEADPHONES
J101,151 J102,152	1-507-416-XX	Ⓒ 4p, PHONO 1, PHONO 2
J103–105 J153–155	1-507-430-XX	Ⓓ 6p, TUNER, AUX 1, AUX 2
J106–109 J156–159	1-507-429-XX	Ⓔ 8p, TAPE 1, TAPE 2 REC OUT 1, REC OUT 2
J110,160 J111,161	1-507-470-00	Ⓒ 4p, PRE/POWER
J501	1-507-453-00	Ⓒ TAPE 2
J502	1-507-454-00	Ⓒ REC OUT 2
CNJ	⚠1-509-546-00	Ⓓ 3p, socket; AC IN

MISCELLANEOUS

CB801,802	⚠1-532-531-11	Ⓒ Circuit Breaker, 2A
CP701 CP751,752	⚠1-102-355-11	Ⓑ Encapsulated Component
F801	⚠1-532-496-11	Ⓒ Fuse 10A
M801,851	1-520-291-00	Ⓛ Meter, level
RY001,002	1-515-277-00	Ⓕ Relay
RY801,802	1-515-257-00	Ⓗ Relay (TA-F7)
	1-515-293-00	Ⓗ Relay (TA-F7B)
RY803	1-515-278-00	Ⓕ Relay
TM1,2	1-535-182-00	Ⓕ Terminal Strip, 4p; SPEAKER A, B
	1-506-370-00	Ⓑ Plug
	1-525-186-00	Ⓑ Socket, transistor
	1-536-430-12	Ⓑ Terminal Strip

ACCESSORIES & PACKING MATERIALS

Part No.	Description
1-506-113-00	Ⓑ Short Plug
1-534-819-12	Ⓖ Cord, power (UK model)
3-701-020-00	Ⓐ Bag, SS check sheet
3-701-622-00	Ⓐ Bag, plastic (UK model)
3-770-394-11	Ⓚ Manual, instruction
4-848-648-00	Ⓑ Bag, protection
4-848-659-00	Ⓗ Carton (TA-F7)
4-848-664-00	Ⓗ Carton (TA-F7B)
4-848-660-00	Ⓓ Frame
4-848-661-00	Ⓒ Cushion, lower
4-848-658-00	Ⓒ Cushion, upper

Note: The components identified by shading and ⚠ mark are critical for safety. Replace only with part number specified.

HARDWARE NOMENCLATURE

Screw:

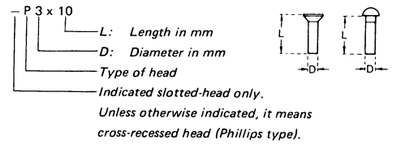

Nut, Washer, Retaining ring:



Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		braizer-head screw	

Reference Designation	Shape	Description	Remarks
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon-socket set screw	ex: SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	

1/4 WATT CARBON RESISTORS Ⓐ

Note: Circled letter Ⓐ is appricable to European model only.

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-244-601-11	10	1-244-625-11	100	1-244-649-11	1.0k	1-244-673-11	10 k	1-244-697-11	100k	1-244-721-11	1.0M	1-244-745-11
1.1	1-244-602-11	11	1-244-626-11	110	1-244-650-11	1.1k	1-244-674-11	11 k	1-244-698-11	110k	1-244-722-11	1.1M	1-244-746-11
1.2	1-244-603-11	12	1-244-627-11	120	1-244-651-11	1.2k	1-244-675-11	12 k	1-244-699-11	120k	1-244-723-11	1.2M	1-244-747-11
1.3	1-244-604-11	13	1-244-628-11	130	1-244-652-11	1.3k	1-244-676-11	13 k	1-244-700-11	130k	1-244-724-11	1.3M	1-244-748-11
1.5	1-244-605-11	15	1-244-629-11	150	1-244-653-11	1.5k	1-244-677-11	15 k	1-244-701-11	150k	1-244-725-11	1.5M	1-244-749-11
1.6	1-244-606-11	16	1-244-630-11	160	1-244-654-11	1.6k	1-244-678-11	16 k	1-244-702-11	160k	1-244-726-11	1.6M	1-244-750-11
1.8	1-244-607-11	18	1-244-631-11	180	1-244-655-11	1.8k	1-244-679-11	18 k	1-244-703-11	180k	1-244-737-11	1.8M	1-244-751-11
2.0	1-244-608-11	20	1-244-632-11	200	1-244-656-11	2.0k	1-244-680-11	20 k	1-244-704-11	200k	1-244-728-11	2.0M	1-244-752-11
2.2	1-244-609-11	22	1-244-633-11	220	1-244-657-11	2.2k	1-244-681-11	22 k	1-244-705-11	220k	1-244-729-11	2.2M	1-244-753-11
2.4	1-244-610-11	24	1-244-634-11	240	1-244-658-11	2.4k	1-244-682-11	24 k	1-244-706-11	240k	1-244-730-11	2.4M	1-244-754-11
2.7	1-244-611-11	27	1-244-635-11	270	1-244-659-11	2.7k	1-244-683-11	27 k	1-244-707-11	270k	1-244-731-11	2.7M	1-244-755-11
3.0	1-244-612-11	30	1-244-636-11	300	1-244-660-11	3.0k	1-244-684-11	30 k	1-244-708-11	300k	1-244-732-11	3.0M	1-244-756-11
3.3	1-244-613-11	33	1-244-637-11	330	1-244-661-11	3.3k	1-244-685-11	33 k	1-244-709-11	330k	1-244-733-11	3.3M	1-244-757-11
3.6	1-244-614-11	36	1-244-638-11	360	1-244-662-11	3.6k	1-244-686-11	36 k	1-244-710-11	360k	1-244-734-11	3.6M	1-244-758-11
3.9	1-244-615-11	39	1-244-639-11	390	1-244-663-11	3.9k	1-244-687-11	39 k	1-244-711-11	390k	1-244-735-11	3.9M	1-244-759-11
4.3	1-244-616-11	43	1-244-640-11	430	1-244-664-11	4.3k	1-244-688-11	43 k	1-244-712-11	430k	1-244-736-11	4.3M	1-244-760-11
4.7	1-244-617-11	47	1-244-641-11	470	1-244-665-11	4.7k	1-244-689-11	47 k	1-244-713-11	470k	1-244-737-11	4.7M	1-244-761-11
5.1	1-244-618-11	51	1-244-642-11	510	1-244-666-11	5.1k	1-244-690-11	51 k	1-244-714-11	510k	1-244-738-11	5.1M	1-244-762-11
5.6	1-244-619-11	56	1-244-643-11	560	1-244-667-11	5.6k	1-244-691-11	56 k	1-244-715-11	560k	1-244-739-11		
6.2	1-244-620-11	62	1-244-644-11	620	1-244-668-11	6.2k	1-244-692-11	62 k	1-244-716-11	620k	1-244-740-11		
6.8	1-244-621-11	68	1-244-645-11	680	1-244-669-11	6.8k	1-244-693-11	68 k	1-244-717-11	680k	1-244-741-11		
7.5	1-244-622-11	75	1-244-646-11	750	1-244-670-11	7.5k	1-244-694-11	75 k	1-244-718-11	750k	1-244-742-11		
8.2	1-244-623-11	82	1-244-647-11	820	1-244-671-11	8.2k	1-244-695-11	82 k	1-244-719-11	820k	1-244-743-11		
9.1	1-244-624-11	91	1-244-648-11	910	1-244-672-11	9.1k	1-244-696-11	91 k	1-244-720-11	910k	1-244-744-11		

Sony Corporation

9-958-464-01

78C0677-1
Printed in Japan